

CONDENSATE NEUTRALIZING KITS


Condensate neutralizers are designed to raise the pH level of the condensate discharged by high-efficiency boilers and water heaters.

STANDARD FEATURES

- Clear tube for visual inspection
- Integrated unions with o-rings
- Calcite and magnesium oxide media
- Includes PVC adapters
- Includes mounting brackets

PREVENTS POSSIBLE DAMAGE TO:

- Cast Iron Soil Pipe
- ABS Pipe
- Septic Tanks
- Plants
- Waste Water Treatment Plants
- Other Waste Water Equipment and Components

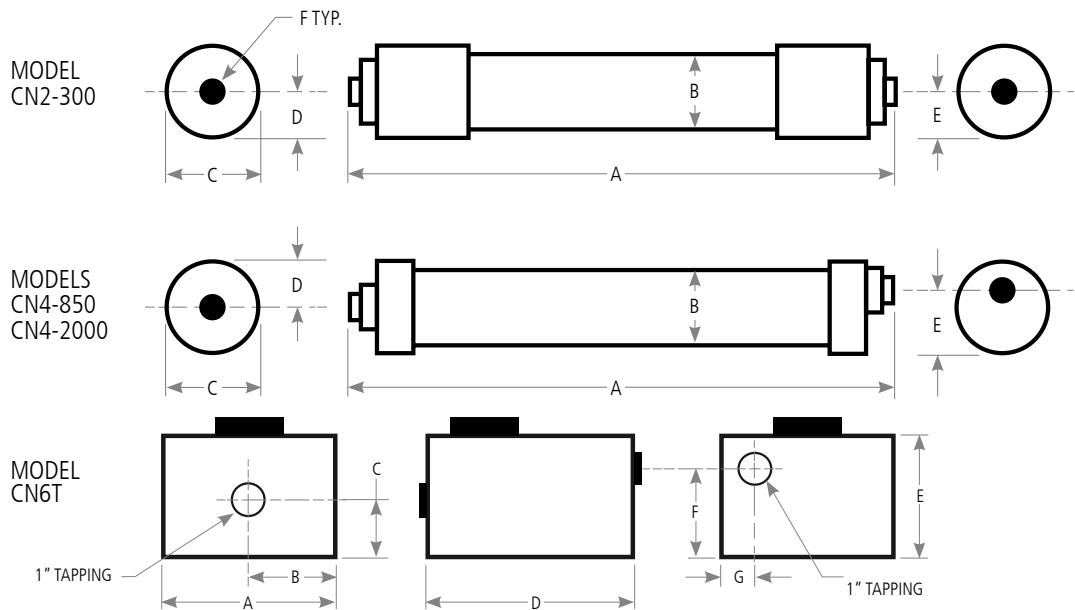

| RATINGS AND DIMENSIONS IN (CM) | | | | | | | | |
|--------------------------------|----------------------|-----------|----------|----------|---------|---------|----------|---------|
| MODEL | BTU/h INPUT CAPACITY | A | B | C | D | E | F | G |
| CN2-300 | 75,000 to 300,000 | 18 ¾ (48) | 2 ⅜ (6) | 2 ¾ (7) | 1 (3) | 1 (3) | ½" FNPT | - |
| CN4-850 | 400,000 to 850,000 | 16 ¾ (43) | 4 (10) | 4 ¼ (11) | 2 (5) | 3 ⅝ (9) | ½" FNPT | - |
| CN4-2000 | 1M to 2M | 27 ¾ (70) | 4 (10) | 4 ¼ (11) | 2 (5) | 3 ⅝ (9) | ½" FNPT | - |
| CN6T | 2.5M to 6M | 12 (30) | 6 ⅝ (17) | 3 ¾ (10) | 15 (38) | 8 (20) | 5 ¾ (15) | 2 ⅝ (7) |

All dimensions +/- 1/8"
Recharge kits sold separately