


## LEGEND

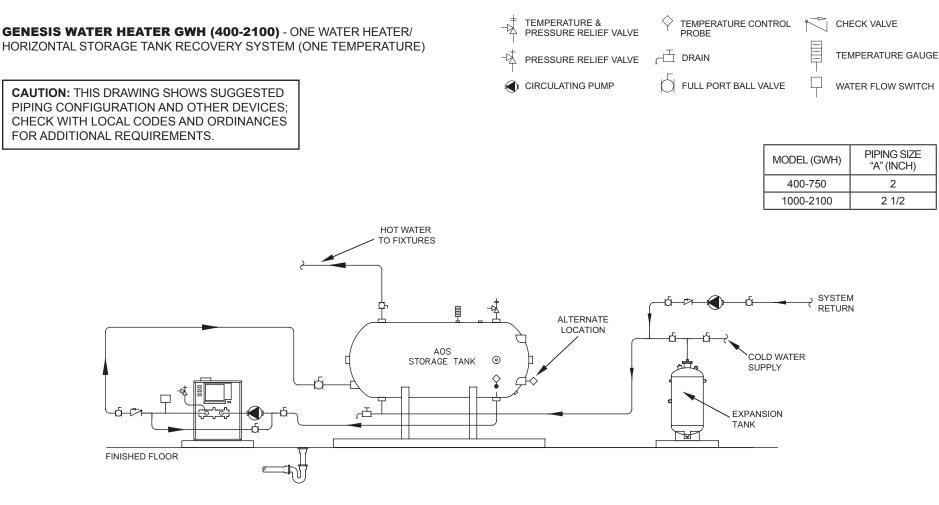

## NOTES:

- 1. Preferred piping method.
- 2. The temperature and pressure relief valve setting shall not exceed pressure rating of any component in the system.
- 3. Service valves are shown for servicing water heater. However, local codes shall govern their usage.
- 4. A. O. Smith piping method is based on 50 equivalent feet of piping. Water heater placement shall be as close as practical to the storage tank. Applications in excess of these recommendations shall require a licensed engineer for design assistance.
- 5. Pumps are mounted on rear header of each water heater (1000-2100).

For Technical Information and Automated Fax Service, call 800-527-1953 or visit www.hotwater.com. A. O. Smith Corporation reserves the right to make product changes or improvements without prior notice.