


LEGEND

GENESIS WATER HEATERS GWH (400-2100) - TWO WATER HEATERS / VERTICAL STORAGE TANK RECOVERY SYSTEM (ONE TEMPERATURE)

CAUTION: THIS DRAWING SHOWS SUGGESTED PIPING CONFIGURATION AND OTHER DEVICES; CHECK WITH LOCAL CODES AND ORDINANCES FOR ADDITIONAL REQUIREMENTS.

TEMPERATURE & PRESSURE RELIEF VALVE	TEMPERATURE CONTROL PROBE		CHECK VALVE
PRESSURE RELIEF VALVE	_ ☐ DRAIN		TEMPERATURE GAUGE
CIRCULATING PUMP	FULL PORT BALL VALVE	P	WATER FLOW SWITCH

MODEL (GWH)	PIPING SIZE "A" (INCH)	MANIFOLD PIPING SIZE "B" (INCH)
400-750	2	3
1000-2100	2 1/2	4

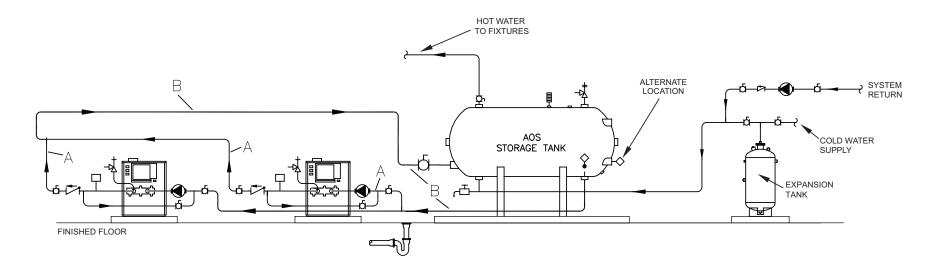

NOTES:

- 1. Preferred piping method.
- 2. The temperature and pressure relief valve setting shall not exceed pressure rating of any component in the system.
- 3. Service valves are shown for servicing water heater. However, local codes shall govern their usage.
- 4. A. O. Smith piping method is based on 50 equivalent feet of piping. Water heater placement shall be as close as practical to the storage tank. Applications in excess of these recommendations shall require a licensed engineer for design assistance.
- 5. Temperature control probe (quad thermistor probe, P/N 9006905005) must be installed onto the tank, and connected to each water heater.