

VERTEX® 96% THERMAL EFFICIENCY

CONTINUOUS HOT WATER VERSATILE POWER DIRECT VENT

Today's homes demand more hot water than ever before, and the 96% efficient Vertex power direct vent gas water heaters offer unprecedented levels of performance to meet the need. The fully condensing Vertex design is so advanced, it delivers hot water shower after shower...at a continuous flow of over 4 gallons per minute.*

ENERGY STAR® QUALIFIED

HELICAL INTERNAL HEAT EXCHANGER

- Spiral heat exchanger keeps hot combustion gases in the tank longer to lengthen the heat transfer cycle
- Positioned in the center of the tank for more even heat distribution
- Operates at 96% thermal efficiency, which saves money on operating costs compared to a standard 80% efficient gas water heater

POWER DIRECT VENT DESIGN

- Top fired burner
- Combined vertical and horizontal runs terminating through an outside wall using ULC S636 PVC, CPVC or polypropylene pipe
- 2" pipe, vents up to 45 equivalent feet
- 3" pipe, vents up to 128 equivalent feet

CONDENSING DESIGN

- 96% efficient condensing design
- Equipped with condensate drain tee

SIDE-MOUNTED HOT AND COLD RECIRCULATING TAPS

- Allows Vertex to be installed as part of combination space heating/water heating applications

INTELLIGENT CONTROL SYSTEM WITH TOUCH SCREEN DISPLAY

- Exclusive touch display control system
- Precise temperature control
- Advanced diagnostics

POWERED ANODES STANDARD

- Provides long-lasting tank protection in varying water conditions
- Powered anodes are non-sacrificial
- Automatically adjusts output needed to properly protect the tank

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

AVAILABLE IN NATURAL GAS OR PROPANE

MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

CODE COMPLIANCE

- Meets the thermal efficiency and standby loss requirements of NRCan and current edition of ASHRAE/IESNA 90.1

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 PSI test pressure and 150 PSI working pressure. Listed according to ANSI Z21.10.3 - CSA 4.3 standards governing storage tank-type water heaters

WARRANTY

- 6 year limited tank warranty
- 6 year limited parts warranty

For complete information, consult written warranty or A. O. Smith

Model GDHE-50 *4.31 GPM continuous flow, based on 65°F inlet water temperature, 110°F outlet temperature.



MODEL SHOWN GDHE-75



PERFORMANCE

MODEL	SERIES	CAPACITY		MAXIMUM CERTIFIED ALTITUDE	INPUT	RECOVERY RATE AT 90°F TEMPERATURE RISE	THERMAL EFFICIENCY	UEF	BC COMPLIANT
		USG	L						
NATURAL GAS									
GDHE-50	300/301	50	189	10,100 (3,078)	100,000	128 (485)	96%	0.88	√
GDHE-75	300/301	75	284	10,100 (3,078)	100,000	128 (485)	96%	0.86	√


Available in Propane (LP) gas. Specify when ordering Propane (LP) gas.
 Natural gas models are series 140. Propane models are series 141.
 Optional Condensate Neutralizer Kit available (Part Number 9007959005).

DIMENSIONS & SHIPPING WEIGHT

MODEL	HEIGHT TO TOP OF TANK	HEIGHT TO T&P	HEIGHT TO UPPER SIDE CONNECTION	TANK DIAMETER	HEIGHT TO LOWER SIDE CONNECTION	HEIGHT TO DRAIN VALVE	OUTLET TO INLET	TOP WATER CONNECTIONS	SIDE WATER CONNECTIONS	GAS CONNECTION	SHIPPING WEIGHT
	A IN (CM)	B IN (CM)	B IN (CM)	C IN (CM)	D IN (CM)	E IN (CM)	F IN (CM)	IN NPT	IN NPT	IN NPT	LB (KG)
NATURAL GAS											
GDHE-50	66 3/4 (170)	49 1/4 (125)	49 1/4 (125)	22 (56)	15 3/4 (40)	3 (8)	8 (20)	3/4	3/4	1/2	255 (116)
GDHE-75	65 1/4 (166)	45 3/8 (116)	45 3/8 (116)	27 3/4 (71)	16 (41)	3 3/4 (10)	8 (20)	1	3/4	1/2	382 (173)

Inlet and outlet connections: 3/4" male for GDHE-50 and 1" for GDHE-75
 Circulation loop connections: 3/4" female
 Gas inlet: 1/2"

Maximum supply pressure: 14" W.C. (3.48kPa)
 Minimum supply pressure for natural gas: 3.50" W.C. (.87kPa)
 Minimum supply pressure for propane: 8.00" W.C. (1.99kPa)
 Minimum supply pressure must be maintained under both load and no load (dynamic and static) conditions
 Electrical characteristics: 120V, 60Hz, amperes <5

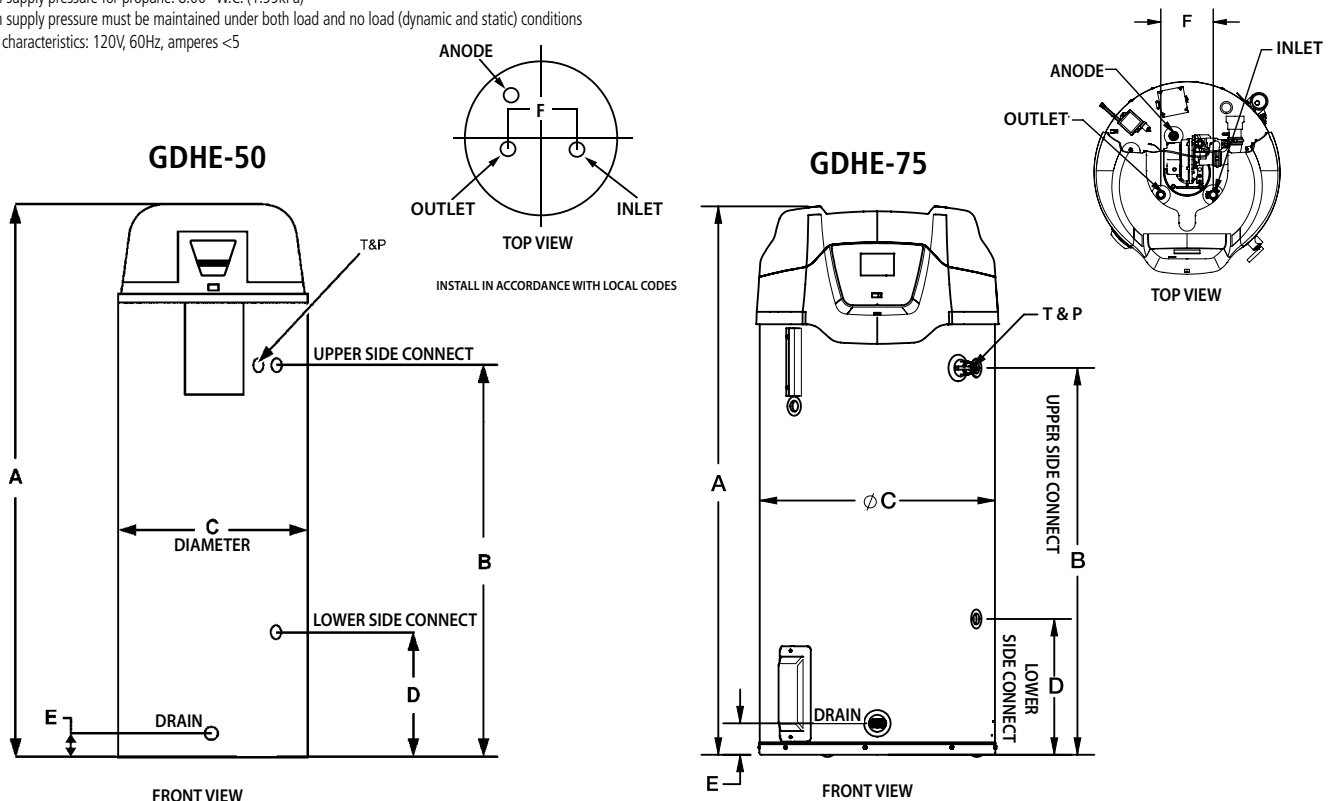

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.