

### CYCLONE™ HE POWER VENT

The Cyclone™ HE is a light-duty, power vent, fully condensing commercial gas water heater with an internal helical heat exchanger, similar to the design of A. O. Smith's industry-leading Cyclone™ models. This helical heat exchanger helps Cyclone™ HE achieve 94% thermal efficiency and deliver outstanding hot water output.

#### INTELLI-VENT™\* GAS CONTROL WITH SILICON NITRIDE HOT SURFACE IGNITOR

- Premium-grade hot surface ignitor eliminates standing pilot.
- Electronic circuitry provides superior system diagnostics capabilities plus extremely precise temperature control.
- Temperature control up to 181°F.

#### POWER VENT DESIGN FOR INSTALLATION VERSATILITY

- Modular blower, with 6-foot cord and standard 3-prong connector.
- Combined vertical and horizontal runs terminating through an outside wall, using Schedule 40 PVC, CPVC or polypropylene pipe: Canadian installations require ULC S636 approved pipe for venting.
  - 2" pipe allows vent runs up to 25 equivalent feet
  - 3" pipe allows vent runs up to 65 equivalent feet
  - 4" pipe allows vent runs up to 128 equivalent feet

#### HIGH OUTPUT WITH SMALL FOOTPRINT

- 22" diameter, combined with 94% efficiency, 50-gallon tank and 76,000 BTU input means Cyclone™ HE can be installed in less space than a larger 75-gallon unit, with equal or better performance.
- Total height is 71 1/8" to top of blower outlet.

#### GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J.

#### SIDE-MOUNTED TAPS FOR RECIRCULATING SYSTEMS

- Hot and cold side taps allow Cyclone™ Power Vent to be used for combination systems for water heating plus space heating, radiant floor heating or other applications requiring a recirculating hot water loop.

#### BLUE DIAMOND® GLASS COATING WITH TWO HEAVY DUTY ANODE RODS

- Provides superior corrosion resistance compared to industry standard glass lining.

#### DYNACLEAN™ DIFFUSER DIP TUBE

#### MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

#### STANDARDS AND CERTIFICATIONS

- Meets UBC, CEC and ICC National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1.
- Design certified by Underwriters Laboratories Inc. under American National Standard/CSA Standard for Gas Water Heaters ANSI Z21.10.3 - CSA 4.3 (current edition).
- CSA certified and ASME rated T&P relief valve.
- Not recommended for sanitation rinse.

#### 3-YEAR LIMITED TANK AND 1-YEAR LIMITED PARTS WARRANTY



- For complete warranty information, consult written warranty or go to [hotwater.com](http://hotwater.com).

\*Intelli-Vent™ is a trademark of Emerson Electric Company



SERIES 130



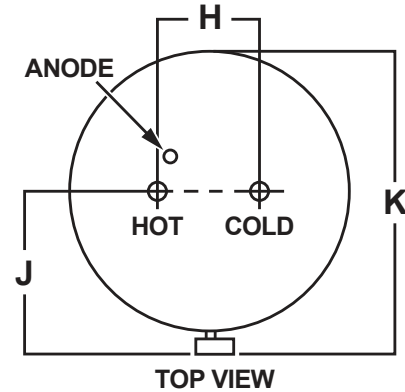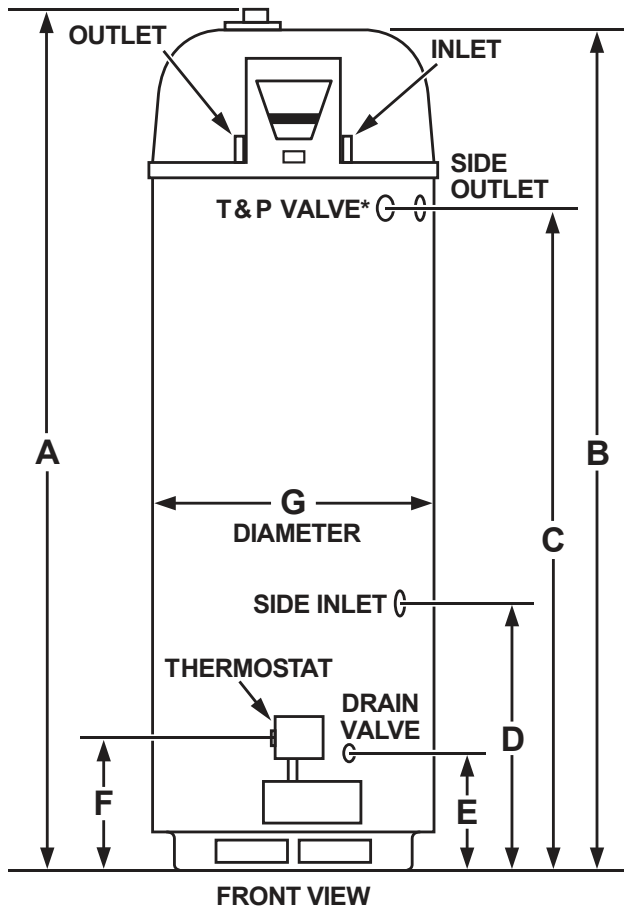

\*INSTALL IN ACCORDANCE WITH LOCAL CODES

MODEL NUMBER	GALLON/LITRE CAPACITY	RECOVERY @ 90°F RISE GALLON PER HOUR	BTU/h	DIMENSIONS	A	B	C	D	E	F	G	H	J	K	APPROX. SHIPPING WEIGHT (LBS/KG)
BTX-80	50/189	95	76,000	Inches	71 1/8	68 3/4	51 7/8	20 7/8	9 1/8	12	22	8	15 3/4	27	225/102
				cm	181	175	132	53	23	30	56	20	40	68	

Available in natural gas only.  
 Top inlet and outlet connections: 3/4" male NPT.  
 Circulation loop connections: 3/4" female NPT.  
 Standard model certified for sea level to 5,300 ft. elevation. Order SMR K30 for elevations to 10,100 ft.  
 Optional Condensate Neutralizer Kit available (Part Number 100112380).  
 Electrical characteristics: 120 volt, 60 Hz <5 amps

MODEL NUMBER	RECOVERY CAPACITIES													
	TEMPERATURE RISE	°F	30	40	50	60	70	80	90	100	110	120	130	140
		°C	17	22	28	33	39	44	50	56	61	67	72	78
BTX-80	GPH		286	215	172	143	123	107	95	86	78	72	66	61
	LPH		1084	813	651	542	465	407	361	325	296	271	250	232

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.