

Residential Product Guide





A. O. Smith Water Heaters

It's no surprise that we've built a global reputation for water heating innovation. What might come as a surprise is the fact that we view this accomplishment as a mere beginning – an indication of even greater things to come.

We employ over 10,000 people worldwide committed to research, innovation and customer service excellence. Our engineering facilities, labs, robust testing procedures, and protective coatings and electronics division deliver the highest quality and advanced designs for water heating.

Table of Contents

RESIDENTIAL TANK-TYPE PRODUCTS

Electric Water Heaters..... 4

ProLine® & ProLine® Master 4

Space Saver® 6

ProLine® XE Heat Pump..... 8

Gas Water Heaters 10

ProLine® & ProLine® Master Atmospheric Vent..... 10

ProLine® XE Atmospheric Vent..... 12

ProLine® XE Power Vent..... 14

ProLine® XE Power Direct Vent..... 16

ProLine® Direct Vent 18

High-efficiency Gas Water Heaters 20

Vertex® Power Vent 20

Vertex® Power Direct Vent..... 22

Vertex® HV 24

Polaris™ 26

RESIDENTIAL TANKLESS PRODUCTS

Powered by Takagi 28

Electric Tankless Products..... 29

Point of Use Tankless 29

Gas Tankless Products 30

Adapt™ Tankless..... 30

Condensing Tankless 34

APPENDICES

Ohm's Law 38

Reference Guide for Water Heating..... 38

Commercial-Grade Residential Water Heaters

ProLine® & ProLine® Master ELECTRIC

ENERGY SAVINGS

- Meets and exceeds NRCan energy efficiency standards
- Styropour™ base for added energy efficiency

DESIGNED FOR PERFORMANCE

- ProLine® and ProLine® Master models are residential water heaters with commercial-grade quality
- Factory-installed plastic-lined heat trap nipples
- Blue Diamond® glass coating protects steel tank from corrosion and maximizes tank life
- Thermostatically controlled, long life elements
- Brass drain valve
- CFC-free foam insulation

SERVICEABILITY



- Conveniently located T&P and drain valve for ease of installation and serviceability
- CoreGard™ magnesium anode with a stainless steel core protects the tank against corrosion

DynaClean™ DIFFUSER DIP TUBE

- Helps reduce lime and sediment buildup, maximizes hot water output and is made from long-lasting PEX cross-linked polymer

WARRANTY

- 6 year limited tank and parts warranty on ProLine® models
- 8 year limited tank and parts warranty on ProLine® Master models
- 2 and 4 year tank warranty extension kits are available for 6 year models

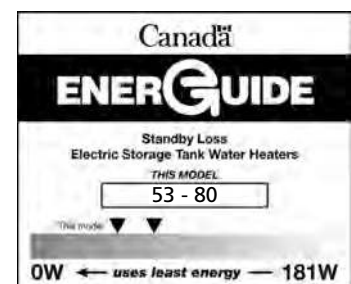

SPECIFICATIONS

| MODEL | SERIES | CAPACITY | | | ELEMENTS (UPPER AND LOWER) | | STANDBY LOSS | ENERGY FACTOR | FIRST HOUR RATING | HEIGHT TO TOP OF TANK A | DIAMETER B | SHIPPING WEIGHT | WARRANTY TANK/PARTS | BC/ON/QC COMPLIANT |
|--------------|--------|----------|-----|--------|-------------------------------|-------|-----------------|------------------|----------------------|-------------------------------|---------------|--------------------|------------------------|-----------------------|
| | | IG | USG | LITRES | WATTS | VOLTS | WATTS | | GPH (LPH) | IN (CM) | IN (CM) | LB (KG) | YEARS | |
| TOP ENTRY | | | | | | | | | | | | | | |
| EPSX 50 | 250 | 40 | 50 | 182 | 3000 | 208 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 6/6 | √ |
| EPSX 50 | 250 | 40 | 50 | 182 | 3000+ | 240 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 6/6 | √ |
| EPSX 50 | 250 | 40 | 50 | 182 | 3800++ | 240 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 6/6 | √ |
| EPSX 50 | 250 | 40 | 50 | 182 | 4500 | 208 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 6/6 | √ |
| EPSX 50 | 250 | 40 | 50 | 182 | 4500+++ | 240 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 6/6 | √ |
| EPSX 50 | 250 | 40 | 50 | 182 | 5500 | 208 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 6/6 | √ |
| EPSX 50 | 250 | 40 | 50 | 182 | 6000++++ | 240 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 6/6 | √ |
| ECT 66 | 275 | 50 | 66 | 250 | 3800++ | 240 | 79 | 0.88 | 72 (272) | 60 ¼ (153) | 22 (56) | 146 (66) | 6/6 | |
| ECT 66 | 275 | 50 | 66 | 250 | 4500 | 208 | 79 | 0.88 | 72 (272) | 60 ¼ (153) | 22 (56) | 146 (66) | 6/6 | |
| ECT 66 | 275 | 50 | 66 | 250 | 4500+++ | 240 | 79 | 0.88 | 72 (272) | 60 ¼ (153) | 22 (56) | 146 (66) | 6/6 | |
| ECT 80 | 250 | 60 | 80 | 287 | 3000 | 208 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| ECT 80 | 250 | 60 | 80 | 287 | 3000+ | 240 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| ECT 80 | 250 | 60 | 80 | 287 | 3800++ | 240 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| ECT 80 | 250 | 60 | 80 | 287 | 4500 | 208 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| ECT 80 | 250 | 60 | 80 | 287 | 4500+++ | 240 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| ECT 80 | 250 | 60 | 80 | 287 | 5500 | 208 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| ECT 80 | 250 | 60 | 80 | 287 | 6000++++ | 240 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| TOP ENTRY | | | | | | | | | | | | | | |
| HPSX 50* | 250 | 40 | 50 | 182 | 3000+ | 240 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 8/8 | √ |
| HPSX 50* | 250 | 40 | 50 | 182 | 3800++ | 240 | 53 | 0.92 | 60 (227) | 48 ¾ (124) | 22 (56) | 125 (57) | 8/8 | √ |
| HCT 80* | 250 | 60 | 80 | 287 | 4500+++ | 240 | 78 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 8/8 | √ |
| BOTTOM ENTRY | | | | | | | | | | | | | | |
| EJSH 50 | 250 | 40 | 50 | 182 | 3000 | 208 | 65 | 0.91 | 60 (227) | 48 (122) | 22 (56) | 122 (55) | 6/6 | √ |
| EJSH 50 | 250 | 40 | 50 | 182 | 3000+ | 240 | 65 | 0.91 | 60 (227) | 48 (122) | 22 (56) | 122 (55) | 6/6 | √ |
| EJSH 50 | 250 | 40 | 50 | 182 | 4500 | 208 | 65 | 0.91 | 60 (227) | 48 (122) | 22 (56) | 122 (55) | 6/6 | √ |
| EJSH 50 | 250 | 40 | 50 | 182 | 4500++ | 240 | 65 | 0.91 | 60 (227) | 48 (122) | 22 (56) | 122 (55) | 6/6 | √ |
| EJTH 80 | 250 | 60 | 80 | 287 | 3000 | 208 | 80 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| EJTH 80 | 250 | 60 | 80 | 287 | 3000+ | 240 | 80 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| EJTH 80 | 250 | 60 | 80 | 287 | 4500 | 208 | 80 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |
| EJTH 80 | 250 | 60 | 80 | 287 | 4500++ | 240 | 80 | 0.90 | 81 (307) | 60 ½ (154) | 24 (61) | 170 (77) | 6/6 | √ |

*Model has incoloy elements. All models comply with national energy efficiency regulations.


*Model is dual-rated. At 208V wattage is 2253.

**Model is dual-rated. At 208V wattage is 2854.



***Model is dual-rated. At 208V wattage is 3380.

****Model is dual-rated. At 208V wattage is 4507.

PREFERRED INSTALLATION - TOP ENTRY MODELS

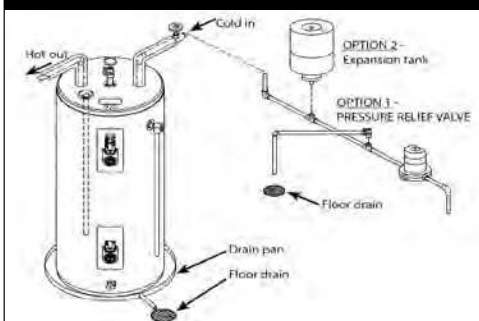

PREFERRED INSTALLATION - BOTTOM ENTRY MODELS

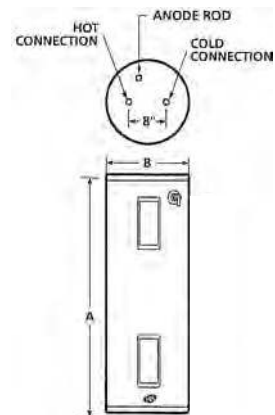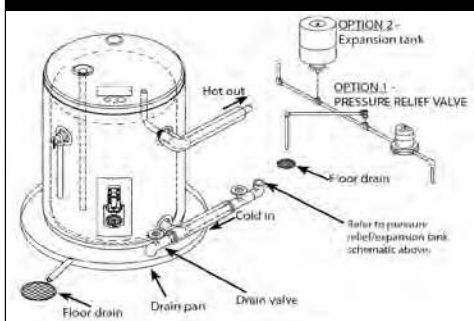

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.



Residential Electric Water Heaters

Featuring a variety of models designed for installations in cottages, offices, mobile homes or other applications where space is limited, the Space Saver® line of residential electric water heaters provides optimum reliability, performance and energy efficiency.

DESIGNED FOR PERFORMANCE

- Exclusive TankSaver® design
- Glass-lined tanks for longer life
- Meets latest energy efficiency standards
- Factory-installed plastic-lined nipples
- Styropour™ base for added energy efficiency
- Thermostatically controlled long life elements
- CFC-free foam insulation
- Personnel protector covers elements and controls

EASY TO INSTALL AND REPAIR


- Conveniently located T&P and drain valve
- Removable anodes

WARRANTY


- 6 year limited tank warranty
- 1 year limited parts warranty

EXCLUSIVE DESIGN


- The exclusive TankSaver design aids the glass lining process to ensure optimum coverage, and guards tank openings for watertight connections



Without
TankSaver®



With
TankSaver®



For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

SE306N (01-23)



Residential Electric Water Heaters

SPECIFICATIONS

| Model | Series | Capacity | | | Input | | Recovery Rate at 90°F Temperature Rise | Standby Loss | Height | Diameter* | Width | Shipping Weight | BC/ON/QC Compliant |
|--|--------|----------|-----|-----|--------|-------|--|--------------|-----------|-----------|-----------|-----------------|--------------------|
| | | IG | USG | L | WATTS | VOLTS | GPH (LPH) | WATTS | A IN (CM) | B IN (CM) | C IN (CM) | LB (KG) | |
| TOP ENTRY SINGLE ELEMENT MODELS | | | | | | | | | | | | | |
| SS025SE15 | 100 | 2 | 2.5 | 9 | 1440 | 120** | 7 (26) | N/A | 14 ½ (37) | 10 ¾ (26) | 11 ¾ (30) | 17 (8) | √ |
| SS04SE15 | 100 | 3 | 4 | 15 | 1440 | 120** | 7 (26) | N/A | 19 ¼ (49) | 10 ¾ (26) | 11 ¾ (30) | 20 (9) | √ |
| BOTTOM ENTRY SINGLE ELEMENT MODELS | | | | | | | | | | | | | |
| SS06SEB15 | N/A | 5 | 6 | 23 | 1500 | 120 | 7 (26) | N/A | 15 ¼ (39) | 14 ¼ (36) | N/A | 35 (16) | √ |
| SS06SEB30 | N/A | 5 | 6 | 23 | 3000+ | 240 | 14 (53) | N/A | 15 ¼ (39) | 14 ¼ (36) | N/A | 35 (16) | √ |
| SS12SEB15 | N/A | 10 | 12 | 45 | 1500 | 120 | 7 (26) | N/A | 22 ¾ (58) | 16 (41) | N/A | 55 (25) | √ |
| SS12SEB30 | N/A | 10 | 12 | 45 | 3000+ | 240 | 14 (53) | N/A | 22 ¾ (58) | 16 (41) | N/A | 55 (25) | √ |
| SS620SSEB-15K | 100 | 14 | 17 | 65 | 1500 | 120 | 7 (26) | 51 | 25 ½ (65) | 20 (51) | N/A | 65 (30) | √ |
| SS620SSEB-30 | 100 | 14 | 17 | 65 | 3000+ | 240 | 14 (53) | 51 | 25 ½ (65) | 20 (51) | N/A | 65 (30) | √ |
| SS630SSEBN-15K | 100 | 22 | 27 | 102 | 1500 | 120 | 7 (26) | 48 | 30 (76) | 22 (56) | N/A | 101 (46) | √ |
| SS630SSEBN-30 | 100 | 22 | 27 | 102 | 3000+ | 240 | 14 (53) | 48 | 30 (76) | 22 (56) | N/A | 101 (46) | √ |
| TOP ENTRY DOUBLE ELEMENT MODELS | | | | | | | | | | | | | |
| SS640SDE3-15K | 100 | 32 | 38 | 144 | 1500 | 120 | 7 (26) | 54 | 50 (127) | 20 (51) | N/A | 103 (47) | √ |
| SS640SDE3-30X | 100 | 32 | 38 | 144 | 3000 | 208 | 14 (53) | 54 | 50 (127) | 20 (51) | N/A | 103 (47) | √ |
| SS640SDE3-30 | 100 | 32 | 38 | 144 | 3000+ | 240 | 14 (53) | 54 | 50 (127) | 20 (51) | N/A | 103 (47) | √ |
| LOWBOY TOP ENTRY DOUBLE ELEMENT MODELS | | | | | | | | | | | | | |
| SS630LDE-45X | 250 | 22 | 27 | 102 | 4500 | 208 | 20 (76) | 53 | 31 (79) | 22 (56) | N/A | 96 (44) | ON/QC only |
| SS630LDE-45 | 250 | 22 | 27 | 102 | 4500++ | 240 | 20 (76) | 53 | 31 (79) | 22 (56) | N/A | 96 (44) | ON/QC only |
| SS640LDE-45X | 250 | 30 | 36 | 137 | 4500 | 208 | 20 (76) | 62 | 33 ½ (85) | 24 (61) | N/A | 113 (51) | ON/QC only |
| SS640LDE-45 | 250 | 30 | 36 | 137 | 4500++ | 240 | 20 (76) | 62 | 33 ½ (85) | 24 (61) | N/A | 113 (51) | ON/QC only |
| SS650LDEN-45 | 280 | 40 | 48 | 181 | 4500 | 240 | 20 (76) | 64 | 37 ¾ (96) | 26 ½ (67) | N/A | 170 (77) | - |



*Depth on model SS025SE15 and SS04SE15.

**Plug-in model.

*Model is dual-rated. At 208V wattage is 2253.

**Model is dual-rated. At 208V wattage is 3380.

Top Entry Single Element Models

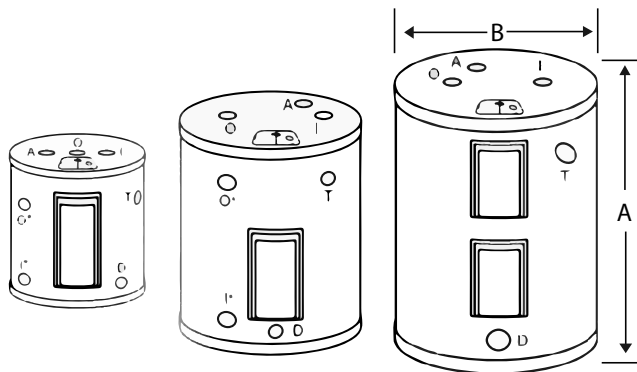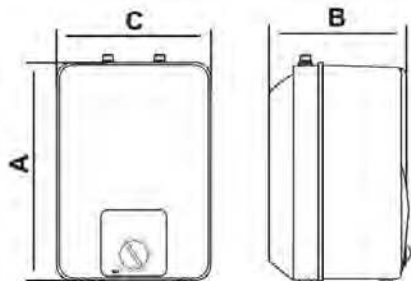

***Note: 6, 12 and 19 USG models have side connections on left side.

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

SE306N (01-23)

ProLine® XE HEAT PUMP

The ProLine® XE heat pump water heaters from A. O. Smith are a cost effective energy-efficient option available for consumers who want to save money on their electric utility bills.

HOW DO THEY WORK?

- Absorbs ambient heat from the surrounding air to heat water using a compressor and environmentally-friendly R134a refrigerant
 - Self-contained heat pump unit is integrated into the top of the tank
 - Multiple operating modes to maximize efficiency and performance

INCREASED ENERGY EFFICIENCY

- Improved efficiency design to ensure available hot water at the lowest possible cost
- Up to a 3.45 Uniform Energy Factor (UEF) conserves energy and exceeds ENERGY STAR® qualifications

CHOICE OF OPERATING MODES

- Select from Efficiency, Hybrid, or Electric modes to match heating requirements to environmental conditions
- Hybrid mode automatically adjusts between compressor and element, depending upon heat requirements
- Vacation mode reduces operating costs and provides freeze protection during extended absence

BACKUP ELECTRIC ELEMENTS

- Long-lasting backup heating elements help heat water according to environmental conditions, demand, and the chosen operating mode

COREGARD™ ANODE ROD

- Anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods
- 66 and 80 gallon models have dual anodes for added protection

DRY FIRE PROTECTION

- Control system checks to ensure the tank is full of water during start up to prevent dry firing the heating elements

ELECTRONIC USER INTERFACE

- User-friendly electronic interface allows easy control of temperature setting, operating mode, and communicates diagnostics
- Easy to read temperature display (see back) shows temperature in °F or °C
- Advanced diagnostics convey error messages for service purposes and the last four error messages are saved in the control system memory

COMMERCIAL-GRADE

- ProLine® XE Heat Pump are residential water heaters with commercial grade quality

OTHER FEATURES

- Ideal for basement installations; the compressor transfers heat to the water while dehumidifying and cooling the ambient air
- Washable air filter is easily removed for routine cleaning

OPTIONAL DUCTING

- Permits installation in confined spaces
- Duct up to 50 feet with air duct adapter kit
- Duct up to 100 feet with air duct adapter and booster fan kits

WARRANTY

- 10 year limited tank and parts warranty
- For complete information, consult written warranty or A. O. Smith



Commercial-Grade Residential Water Heaters

PERFORMANCE

| MODEL | SERIES | NOMINAL CAPACITY USG (L) | INPUT | | UNIFORM ENERGY FACTOR HYBRID MODE | FIRST HOUR RATING HYBRID MODE GPH (LPH) |
|----------|--------|--------------------------------|----------------------|---------|--------------------------------------|---|
| | | | WATTS UPPER/LOWER | VOLTS | | |
| HPTU-50N | 130 | 50 (189) | 4500/4500 | 208/240 | 3.45 | 66 (249) |
| HPTU-66N | 130 | 66 (250) | 4500/4500 | 208/240 | 3.45 | 79 (299) |
| HPTU-80N | 130 | 80 (303) | 4500/4500 | 208/240 | 3.45 | 86 (325) |

Requires 30 amp breaker.
Top T&P option not available.

DIMENSIONS & SHIPPING WEIGHT

| MODEL | INSTALLATION HEIGHT | TANK DIAMETER | HEIGHT TO UPPER SIDE CONNECTION | HEIGHT TO LOWER SIDE CONNECTION | HEIGHT TO DRAIN VALVE | HEIGHT TO T&P | SHIPPING WEIGHT |
|----------|------------------------|------------------|------------------------------------|------------------------------------|--------------------------|------------------|-----------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | D IN (CM) | E IN (CM) | LB (KG) |
| HPTU-50N | 63 (160) | 22 (56) | 40 3/8 (103) | 3 3/4 (10) | 3 3/4 (10) | 40 1/2 (103) | 196 (89) |
| HPTU-66N | 61 (155) | 27 (69) | 38 (97) | 4 (10) | 4 (10) | 38 (97) | 289 (131) |
| HPTU-80N | 69 (175) | 27 (69) | 46 (117) | 4 (10) | 4 (10) | 46 (117) | 307 (139) |

ELECTRONIC USER INTERFACE

- User friendly, easy to read display
- LEDs clearly indicate the current operating mode
- Easily select operating mode:
 - Efficiency
 - Hybrid
 - Electric
 - Vacation
- Display communicates current status, mode and set point, and displays error messages when applicable



EFFICIENCY MODE

- Utilizes the heat pump for all water heating

HYBRID MODE

- Automatically reverts to heating element if ambient air or water temperatures are outside optimal operating range for heat pump
- Utilizes the heat pump or heating element, depending on demand

ELECTRIC MODE


- Standard electric water heater operation

VACATION MODE

- One touch operation maintains tank temperature of 60°F (15.6°C) during vacation or extended absence to reduce operating costs and provide freeze protection
- Programmable up to 99 days

OPTIONAL ACCESSORIES

- 100234320 Inlet and Outlet Air Duct Kit
- 100131328 Booster Fan Kit

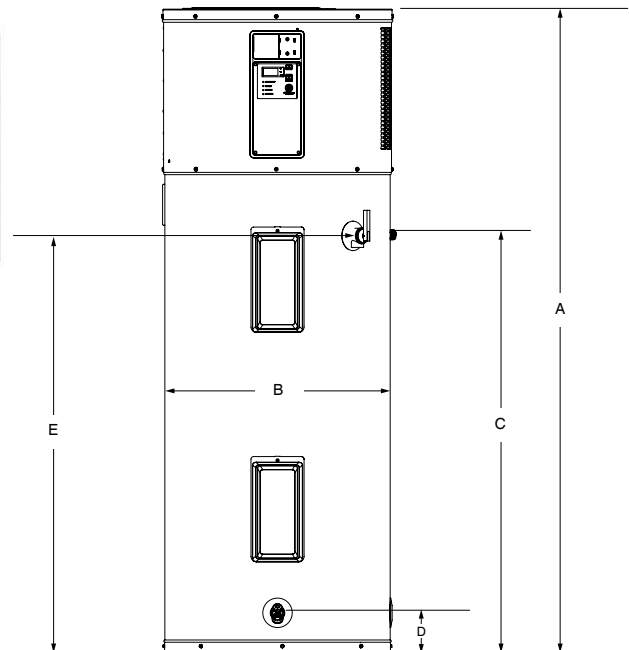

OTHER FEATURES:

- Environmentally-friendly non-CFC foam insulation
- Durable, enhanced-flow tamper-resistant brass drain valve
- 51 dBA decibel level during operation
- CSA certified and ASME rated temperature & pressure relief valve

OPERATING REQUIREMENTS:

- Requires provision for condensate draining; if a suitable drain is not available, a condensate pump is required
- 208/240 VAC 60Hz single phase 30 amp power supply

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

ProLine® & ProLine® Master ATMOSPHERIC VENT

DESIGNED FOR PERFORMANCE

- ProLine® and ProLine® Master models are residential water heaters with commercial-grade quality
- DynaClean™ diffuser dip tube helps reduce lime and sediment buildup, maximizes hot water output and is made from long-lasting PEX cross-linked polymer
- Thermopile design provides robust pilot to withstand down drafts and environmental conditions
- Easy temperature adjustments
- Robust 1/4" pilot tubing
- Blue Diamond® glass coating protects steel tank from corrosion and maximizes tank life
- 3/4" side taps on 75 gallon model for combination applications

SAFETY FEATURES


- If flammable vapours accidentally enter the combustion chamber, the arrestor is designed so flames burn off the top surface and can not escape down through the arrestor

SERVICEABILITY

- Easy-to-access combustion chamber
- Conveniently located T&P and drain valve for ease of installation and serviceability
- Piezoelectric ignitor allows for push-button pilot lighting
- CoreGard™ magnesium anode with a stainless steel core protects the tank against corrosion
- LED indicator:
 - gives visual confirmation that pilot is on by flashing continuously
 - provides diagnostics and troubleshooting

WARRANTY

- 6 year limited tank and parts warranty on ProLine® models
- 8 year limited tank and parts warranty on ProLine® Master models
- 2 and 4 year tank warranty extension kits are available for 6 year models (except FCG-75)



PERFORMANCE

| MODEL | SERIES | CAPACITY | INPUT † | MAXIMUM CERTIFIED ALTITUDE | RECOVERY RATE AT 90°F TEMPERATURE RISE | FIRST HOUR RATING | ENERGY FACTOR | UEF | WARRANTY TANK/PARTS |
|-------------|---------|----------|---------|----------------------------|--|-------------------|---------------|------|---------------------|
| | | USG (L) | BTU/h | FT (M) | GPH (LPH) | GPH (LPH) | | | YEARS |
| NATURAL GAS | | | | | | | | | |
| GCRL 30R | 400/401 | 30 (114) | 32,000 | 10,100 (3,078) | 32 (121) | 55 (208) | 0.64 | 0.60 | 6/6 |
| GCRL 40 | 400/401 | 40 (151) | 40,000 | 10,100 (3,078) | 41 (155) | 67 (254) | 0.62 | 0.58 | 6/6 |
| GCR 40 | 400/401 | 40 (151) | 40,000 | 10,100 (3,078) | 42 (159) | 70 (265) | 0.62 | 0.66 | 6/6 |
| GCRL 50 | 400/401 | 50 (189) | 40,000 | 10,100 (3,078) | 43 (163) | 93 (352) | 0.61 | 0.62 | 6/6 |
| GCR 50 | 400/401 | 50 (189) | 40,000 | 10,100 (3,078) | 42 (159) | 88 (333) | 0.62 | 0.62 | 6/6 |
| GVRT 60 | 400/401 | 60 (227) | 52,200 | 10,100 (3,078) | 54 (204) | 104 (394) | 0.59 | 0.59 | 6/6 |
| FCG 75L* | 400/401 | 75 (284) | 75,100 | 7,700 (2,347) | 80 (303) | 125 (473) | N/A | 0.60 | 6/6 |
| NATURAL GAS | | | | | | | | | |
| HWRL 40 | 400/401 | 40 (151) | 40,000 | 10,100 (3,078) | 41 (155) | 67 (254) | 0.62 | 0.62 | 8/8 |
| HWRL 50 | 400/401 | 50 (189) | 40,000 | 10,100 (3,078) | 43 (163) | 93 (352) | 0.61 | 0.61 | 8/8 |



Natural gas models are series 400. Propane models are series 401. All models comply with national energy efficiency regulations.

* Model has side connections.

† Propane Gas – 36,000 for the 50 gallon short, 37,000 for the 50 gallon tall, 36,000 for 40 gallon models and 29,000 input for 30 gallon models.

DIMENSIONS & SHIPPING WEIGHT

| MODEL | INSTALLATION HEIGHT | HEIGHT TO TOP OF TANK | TANK DIAMETER | HEIGHT TO GAS INLET | COLD CONNECTION TO HOT CONNECTION | HEIGHT TO T&P | DRAFTHOOD CONNECTOR DIAMETER | SHIPPING WEIGHT |
|-------------------|---------------------|-----------------------|---------------|---------------------|-----------------------------------|---------------|------------------------------|-----------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | IN | LB (KG) |
| GCRL 30R | 50 ¼ (128) | 46 ¾ (119) | 20 (51) | 14 (35) | 8 (20) | 40 (102) | 3 or 4 | 108 (49) |
| GCRL 40 / HWRL 40 | 51 ½ (131) | 47 ¾ (121) | 22 (56) | 13 (33) | 8 (20) | 41 (104) | 3 or 4 | 135 (61) |
| GCR 40 | 61 ¾ (157) | 58 ¾ (148) | 20 (51) | 13 (33) | 8 (20) | 51 ¾ (131) | 3 or 4 | 150 (68) |
| GCRL 50 / HWRL 50 | 53 ¾ (135) | 49 ½ (126) | 24 (61) | 13 (33) | 8 (20) | 42 ½ (108) | 3 or 4 | 175 (79) |
| GCR 50 | 61 (155) | 57 ¼ (145) | 22 (56) | 13 (33) | 8 (20) | 50 ¼ (128) | 4 | 165 (75) |
| GVRT 60 | 62 ¾ (159) | 59 (150) | 24 (61) | 13 (33) | 8 (20) | 51 ½ (131) | 4 | 205 (93) |
| FCG 75L* | 61 (155) | 57 ¼ (145) | 26 ½ (67) | 14 ¾ (37) | 8 (20) | 50 ¼ (128) | 4 | 273 (124) |

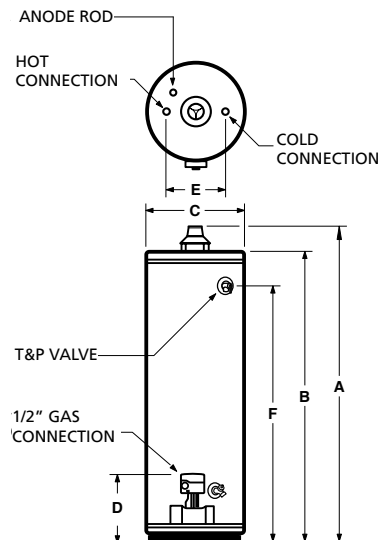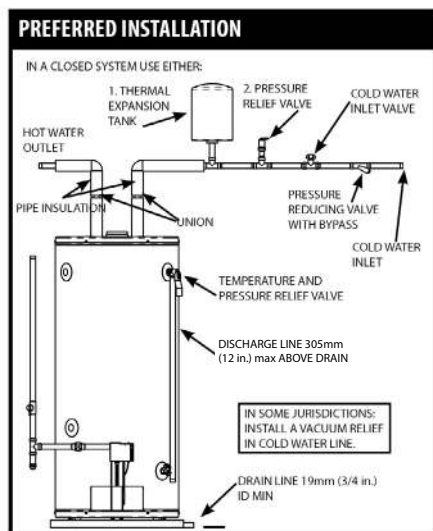

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

ProLine® XE ATMOSPHERIC VENT

ENERGY SAVINGS

- Exceeds NRCAN energy efficiency requirements
- Built-in heat traps on the water inlet and outlet reduce the amount of heat lost through piping

DESIGNED FOR PERFORMANCE

- ProLine® XE models are residential water heaters with commercial-grade quality
- The electronic gas control incorporates an LED status indicator that monitors system operation and service diagnostics
- Operates with an automatic pilot relight system that shuts off the pilot during stand-by modes to reduce gas consumption and eliminates nuisance pilot outage issues associated with standing pilot models
- Plugs into standard 110/120v outlet (10 foot power cord included)
- Blue Diamond® glass coating provides superior corrosion resistance to industry-standard glass lining
- Design certified by CSA International according to ANSI Z21.10.1 - 4.1 CSA Standards governing storage-type water heaters

DynaClean™ DIFFUSER DIP TUBE

- Helps reduce lime and sediment buildup, maximizes hot water output and is made from long-lasting PEX cross-linked polymer

SERVICEABILITY


- CoreGard™ magnesium anode with stainless steel core protects the tank against corrosion
- Durable brass tamper-resistant drain valve
- Conveniently located CSA certified and ASME rated T&P relief valve
- Top mounted T&P relief valve available as an option on all models

SAFETY FEATURES

- Flammable vapour ignition resistant compliant design

WARRANTY

- 6 year tank and parts warranty



PERFORMANCE

| MODEL | SERIES | CAPACITY | INPUT* | MAXIMUM CERTIFIED ALTITUDE | RECOVERY RATE AT 90°F TEMPERATURE RISE | FIRST HOUR RATING | UEF | WARRANTY TANK/PARTS |
|-------------|---------|----------|--------|----------------------------------|---|----------------------|------|------------------------|
| | | USG (L) | BTU/h | FT (M) | GPH (LPH) | GPH (LPH) | | YEARS |
| NATURAL GAS | | | | | | | | |
| GCFL 40 | 100/101 | 40 (151) | 40,000 | 10,100 (3,078) | 41 (155) | 67 (254) | 0.66 | 6/6 |
| GCF 40 | 100/101 | 40 (151) | 40,000 | 10,100 (3,078) | 41 (155) | 67 (254) | 0.64 | 6/6 |
| GCFL 50 | 100 | 50 (189) | 40,000 | 10,100 (3,078) | 41 (155) | 81 (307) | 0.69 | 6/6 |
| GCF 50 | 100/101 | 50 (189) | 40,000 | 10,100 (3,078) | 41 (155) | 81 (307) | 0.69 | 6/6 |

Recovery capacity based on actual performance tests.

Water Connections - 3/4" on all models.

External heat trap nipples are factory-installed on all models.

Natural gas models are series 100. Propane models are series 101. All models comply with national energy efficiency regulations.



*Propane (LP) gas - 37,000 BTU input for 50-gallon model and 36,000 BTU for 40-gallon model.

GCFL 50 not available for Propane.

DIMENSIONS & SHIPPING WEIGHT

| MODEL | INSTALLATION HEIGHT | HEIGHT TO TOP OF TANK | DIAMETER | HEIGHT TO GAS INLET | HOT CONNECTION TO COLD CONNECTION | HEIGHT TO T&P | DRAFTHOOD CONNECTOR DIAMETER | SHIPPING WEIGHT |
|--------------------|------------------------|--------------------------|--------------|------------------------|---|---------------|------------------------------------|--------------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | IN | LB (KG) |
| NATURAL GAS | | | | | | | | |
| GCFL 40 | 54 (137) | 47 ¾ (121) | 22 (56) | 13 (33) | 8 (20) | 41 (104) | 3 or 4 | 149 (68) |
| GCF 40 | 64 ¼ (163) | 58 ¼ (148) | 20 (51) | 13 (33) | 8 (20) | 51 ¾ (131) | 3 or 4 | 152 (69) |
| GCFL 50 | 55 ¾ (142) | 49 ½ (126) | 24 (61) | 13 (33) | 8 (20) | 42 ½ (108) | 3 or 4 | 183 (83) |
| GCF 50 | 63 ½ (161) | 57 ¼ (145) | 22 (56) | 13 (33) | 8 (20) | 50 ¼ (128) | 3 or 4 | 167 (76) |

PREFERRED INSTALLATION

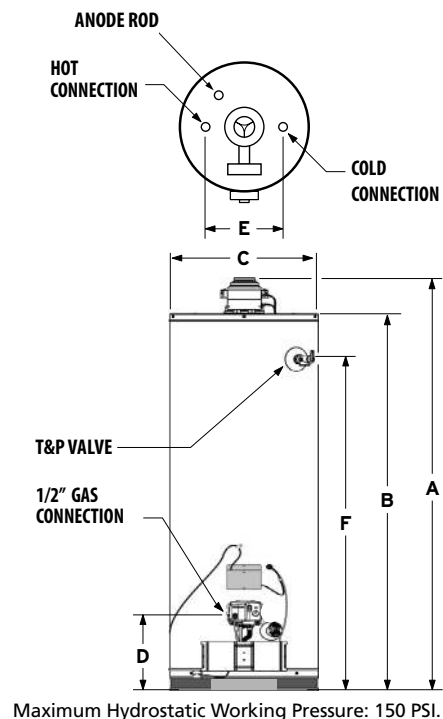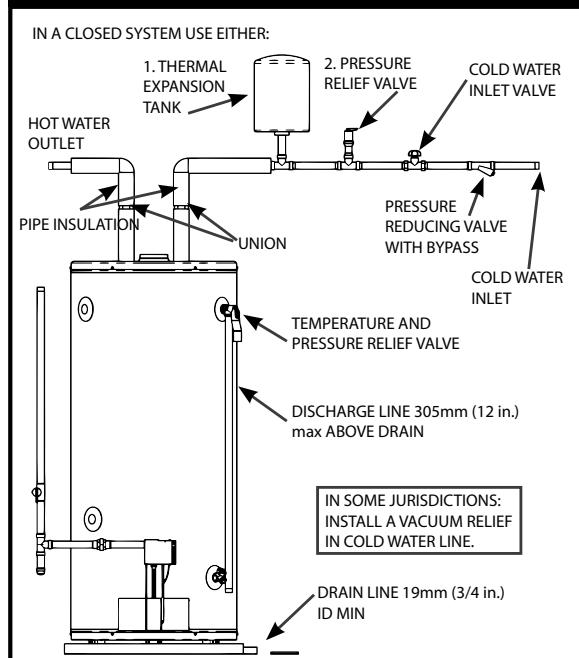

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

ProLine® XE POWER VENT

ENERGY SAVINGS

- Industry-leading energy efficient power vent, with up to a 0.73 UEF
- 2" CFC-free foam insulation to improve energy efficiency
- Built-in heat traps on the water inlet and outlet reduce the amount of heat lost through piping
- Exceeds NRCan energy efficiency standards

DESIGNED FOR PERFORMANCE

- ProLine® XE models are residential water heaters with commercial-grade quality
- Convenient 3/4" side taps for combination applications on 50 USG high-input and 75 USG models
- Suitable for elevations up to 10,100 ft. (3,078 m)
- Available for both natural gas or propane
- Blue Diamond® glass coating protects steel tank from corrosion and maximizes tank life

SAFETY FEATURES

- Sensor detects the presence of flammable vapours and automatically disables the unit, preventing their ignition
- Robust air intake snorkel inhibits flammable vapours from entering the combustion chamber

SERVICEABILITY

- State-of-the-art electronic gas control

features advanced self-diagnostic capability that makes troubleshooting easy


- Conveniently located T&P and drain valve for ease of installation and serviceability

THE ULTIMATE IN VENTING FLEXIBILITY

- Can be vented with 2", 3" or 4" ULC S636 PVC, CPVC or polypropylene pipe
- Vertical or horizontal venting configurations

WARRANTY

- 6 year limited tank and parts warranty
- 8 year limited tank and parts warranty models also available
- 2 and 4 year tank warranty extension kits are available for 6 year models




PERFORMANCE

| MODEL | SERIES | CAPACITY | INPUT | MAXIMUM CERTIFIED ALTITUDE | RECOVERY RATE AT 90°F TEMPERATURE RISE | FIRST HOUR RATING | UEF | WARRANTY TANK/PARTS |
|-------------|---------|----------|--------|----------------------------------|---|----------------------|------|------------------------|
| | | USG (L) | BTU/h | FT (M) | GPH (LPH) | GPH (LPH) | | YEARS |
| NATURAL GAS | | | | | | | | |
| GPVL 40 | 200/201 | 40 (151) | 40,000 | 10,100 (3,078) | 44 (167) | 73 (276) | 0.67 | 6/6 |
| GPVT 40 | 200/201 | 40 (151) | 50,000 | 10,100 (3,078) | 50 (189) | 90 (341) | 0.70 | 6/6 |
| GPVL 50 | 200/201 | 50 (189) | 40,000 | 10,100 (3,078) | 44 (167) | 90 (341) | 0.72 | 6/6 |
| GPVT 50 | 200/201 | 50 (189) | 50,000 | 10,100 (3,078) | 50 (189) | 96 (363) | 0.72 | 6/6 |
| GPVX 50L* | 200/201 | 50 (189) | 62,000 | 10,100 (3,078) | 69 (261) | 110 (416) | 0.73 | 6/6 |
| GPVL 60 | 200/201 | 60 (227) | 42,000 | 10,100 (3,078) | 46 (174) | 106 (401) | 0.69 | 6/6 |
| GPVX 75L* | 200/201 | 75 (284) | 72,000 | 10,100 (3,078) | 80 (303) | 155 (587) | 0.69 | 6/6 |
| NATURAL GAS | | | | | | | | |
| HPVL 50 | 200/201 | 50 (189) | 40,000 | 10,100 (3,078) | 44 (167) | 90 (341) | 0.72 | 8/8 |
| HPVX 50L* | 200/201 | 50 (189) | 62,000 | 10,100 (3,078) | 69 (261) | 110 (416) | 0.73 | 8/8 |

Natural gas models are series 200. Propane models are series 201.

All models comply with national energy efficiency regulations.


* Model has side connections

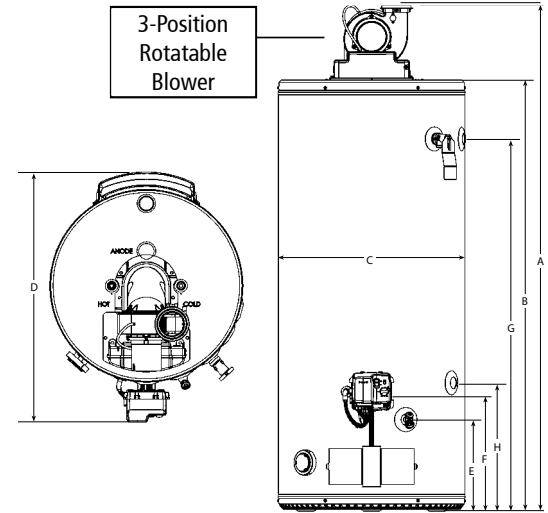

DIMENSIONS & SHIPPING WEIGHT

| MODEL | INSTALLATION HEIGHT | HEIGHT TO TOP OF TANK | TANK DIAMETER | OVERALL DEPTH | HEIGHT TO DRAIN VALVE | HEIGHT TO GAS INLET | HEIGHT TO T&P | HEIGHT TO UPPER SIDE CONNECTION | HEIGHT TO LOWER SIDE CONNECTION | SHIPPING WEIGHT |
|---------------------|------------------------|--------------------------|------------------|------------------|--------------------------|------------------------|------------------|---------------------------------------|---------------------------------------|--------------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | G IN (CM) | G IN (CM) | H IN (CM) | LB (KG) |
| NATURAL GAS | | | | | | | | | | |
| GPVL 40 | 59 (150) | 49 5/8 (126) | 22 (56) | 29 1/8 (74) | 11 (28) | 13 3/4 (34) | 42 1/2 (108) | N/A | N/A | 174 (79) |
| GPVT 40 | 68 1/2 (174) | 59 1/4 (150) | 20 (51) | 27 1/8 (69) | 11 (28) | 13 3/4 (34) | 53 1/8 (135) | N/A | N/A | 176 (80) |
| GPVL 50 / HPVL 50 | 60 1/8 (153) | 50 3/4 (129) | 24 (61) | 31 1/8 (79) | 11 (28) | 13 3/4 (34) | 43 3/4 (111) | N/A | N/A | 198 (90) |
| GPVT 50 | 68 1/8 (173) | 58 3/4 (149) | 22 (56) | 29 1/8 (74) | 11 (28) | 13 3/4 (34) | 51 3/4 (131) | N/A | N/A | 192 (87) |
| GPVX 50L / HPVX 50L | 61 1/8 (155) | 52 (132) | 24 (61) | 31 1/8 (79) | 11 (28) | 13 3/4 (34) | 44 1/2 (113) | 44 1/2 (113) | 15 1/4 (39) | 212 (96) |
| GPVL 60 | 67 1/4 (171) | 57 1/8 (147) | 24 (61) | 31 1/8 (79) | 11 (28) | 13 3/4 (34) | 50 3/8 (128) | N/A | N/A | 216 (98) |
| GPVX 75L | 70 5/8 (179) | 61 1/4 (156) | 26 (66) | 33 1/8 (84) | 11 (28) | 13 3/4 (34) | 53 (135) | 53 (135) | 15 1/4 (39) | 277 (126) |

PREFERRED INSTALLATION

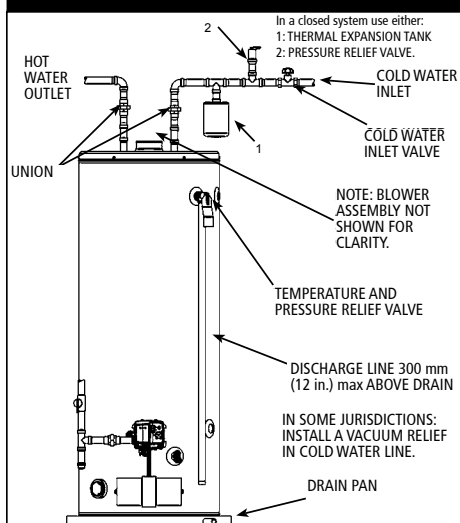

VENT PIPE LENGTHS

| MODEL | VENT PIPE DIAMETER IN | MINIMUM NUMBER OF ELBOWS REQUIRED* | MAXIMUM VENT LENGTH WITH ONE 90° ELBOW FT (M) | MINIMUM VENT LENGTH WITH ONE 90° ELBOW FT (M) |
|---------------------|-----------------------------|---------------------------------------|--|--|
| GPVL 40 | 2 | 0 | 50 (15.2) | 7 (2.1) |
| GPVT 40 | 3 | 0 | 125 (38.1) | 50 (15.2) |
| GPVL 50 / HPVL 50 | 4 | 0 | 180 (54.9) | 125 (38.1) |
| GPVT 50 | 3 | 0 | 50 (15.2) | 7 (2.1) |
| GPVL 60 | 4 | 0 | 125 (38.1) | 50 (15.2) |
| GPVX 50L / HPVX 50L | 3 | 0 | 50 (15.2) | 7 (2.1) |
| GPVX 75L | 4 | 0 | 125 (38.1) | 50 (15.2) |

* Refer to installation manual for further details.

VENT KITS

| DESCRIPTION | PART NUMBER |
|--|-------------|
| 3" Vent Kit Includes coupling for blower outlet and termination screens | 100112701 |
| 4" Vent Termination Kit Includes termination screens | 100112700 |

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

ProLine® XE POWER DIRECT VENT

ENERGY SAVINGS

- Exceeds NRCAN energy efficiency standards
- Factory-installed heat trap nipples

DESIGNED FOR PERFORMANCE

- ProLine® XE are residential water heaters with commercial grade quality
- Compact design – ideal as a replacement water heater and for closet installations
- Ultra-quiet blower
- Convenient 3/4" side water connections for combination applications on high input 50 USG and 75 USG units (plugs are factory-installed)
- Suitable for altitudes up to 10,100 ft. (3,078 m)
- Factory-installed T&P valve and drip tube
- Blue Diamond® glass coating protects steel tank from corrosion and maximizes tank life

SAFETY FEATURES

- Sealed combustion chamber design, eliminating the need for a flammable vapour sensor
- Zero clearance to combustibles

SERVICEABILITY


- State-of-the-art gas control features advanced self diagnostic capability that makes troubleshooting easy
- Conveniently located T&P and drain valve for ease of serviceability
- Auto-reset temperature switch monitors vent temperature

THE ULTIMATE IN VENTING FLEXIBILITY

- Can be vented with 2", 3" or 4" ULC S636 PVC, CPVC or polypropylene pipe up to 180 equivalent feet (see installation manual for full details)
- Can be installed using a concentric vent kit (see reverse or installation manual for details)

WARRANTY

- 6 year limited tank and parts warranty
- 2 or 4 year tank warranty extension kits available




PERFORMANCE

| MODEL | SERIES | CAPACITY | INPUT | RECOVERY RATE AT 90°F TEMPERATURE RISE | FIRST HOUR RATING | UEF | WARRANTY TANK/PARTS |
|-------------|---------|----------|--------|---|----------------------|------|------------------------|
| | | USG (L) | BTU/h | GPH (LPH) | GPH (LPH) | | YEARS |
| NATURAL GAS | | | | | | | |
| GPDL 40 | 300/301 | 40 (151) | 40,000 | 44 (167) | 71 (269) | 0.68 | 6/6 |
| GPDT 50 | 300/301 | 50 (189) | 45,000 | 50 (189) | 93 (352) | 0.72 | 6/6 |
| GPDX 50L * | 300/301 | 50 (189) | 62,000 | 67 (254) | 100 (379) | 0.73 | 6/6 |
| GPDX 75L * | 300/301 | 75 (284) | 72,000 | 82 (310) | 154 (583) | 0.68 | 6/6 |

All models rated for installation at altitudes up to 10,100 ft (3,078 m).

Natural gas models are series 300. Propane models are series 301. All models comply with national energy efficiency regulations.

*Side connections.




DIMENSIONS & SHIPPING WEIGHT

| MODEL | INSTALLATION HEIGHT | HEIGHT TO TOP OF TANK | TANK DIAMETER | OVERALL DEPTH | HEIGHT TO DRAIN VALVE | HEIGHT TO GAS INLET | HEIGHT TO T&P | HEIGHT TO UPPER SIDE CONNECTION | HEIGHT TO LOWER SIDE CONNECTION | VENT DIAMETER | SHIPPING WEIGHT |
|--------------------|------------------------|--------------------------|------------------|------------------|--------------------------|------------------------|------------------|---------------------------------------|---------------------------------------|------------------|--------------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | G IN (CM) | G IN (CM) | H IN (CM) | IN | LB (KG) |
| NATURAL GAS | | | | | | | | | | | |
| GPDL 40 | 58 ¼ (148) | 49 ½ (126) | 22 (56) | 29 7/8 (76) | 11 (28) | 13 ¼ (34) | 42 3/8 (108) | N/A | N/A | 2, 3 or 4 | 174 (79) |
| GPDT 50 | 67 ½ (171) | 58 7/8 (150) | 22 (56) | 29 7/8 (76) | 11 (28) | 13 ¼ (34) | 51 ¾ (131) | N/A | N/A | 2, 3 or 4 | 192 (87) |
| GPDX 50L | 68 7/8 (175) | 60 ¼ (153) | 22 (56) | 29 7/8 (76) | 11 (28) | 13 ¼ (34) | 52 ¾ (134) | 52 ¾ (134) | 15 ¼ (39) | 3 or 4 | 200 (91) |
| GPDX 75L | 70 5/8 (179) | 60 ½ (154) | 26 (66) | 33 7/8 (86) | 11 (28) | 13 ¼ (34) | 53 (135) | 53 (135) | 15 ¼ (39) | 3 or 4 | 277 (126) |

VENT PIPE LENGTHS

| MODEL | VENT PIPE DIAMETER IN | MINIMUM NUMBER OF ELBOWS REQUIRED* | MINIMUM VENT LENGTH WITH ONE ELBOW FT (M) | | MAXIMUM EQUIVALENT VENT LENGTH FT (M) | |
|----------|-----------------------------|--|---|---------|---|----------|
| | | | CONCENTRIC | 2 PIPE | CONCENTRIC | 2 PIPE |
| GPDL 40 | 2 | 1 | 7 (2) | 7 (2) | 50 (15) | 50 (15) |
| | 3 | 1 | 7 (2) | 7 (2) | 100 (30) | 125 (38) |
| | 4 | 1 | N/A | 50 (15) | N/A | 180 (55) |
| GPDT 50 | 2 | 1 | 7 (2) | 7 (2) | 50 (15) | 50 (15) |
| | 3 | 1 | 7 (2) | 7 (2) | 100 (30) | 125 (38) |
| | 4 | 1 | N/A | 50 (15) | N/A | 180 (55) |
| GPDX 50L | 3 | 1 | 7 (2) | 7 (2) | 45 (14) | 50 (15) |
| | 4 | 1 | N/A | 50 (15) | N/A | 125 (38) |
| GPDX 75L | 3 | 1 | 7 (2) | 7 (2) | 30 (9) | 50 (15) |
| | 4 | 1 | N/A | 50 (15) | N/A | 125 (38) |

*Refer to installation manual for further details.

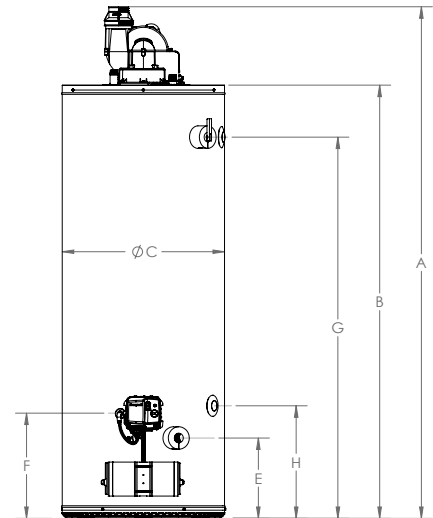

OPTIONAL KITS

| DESCRIPTION | PART NUMBER |
|------------------------|-------------|
| 2" concentric vent kit | 100112869 |
| 3" concentric vent kit | 100111100 |
| High ambient kit | 100308923 |

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

ProLine® DIRECT VENT

DESIGNED FOR PERFORMANCE

- ProLine® models are residential water heaters with commercial-grade quality
- Thermopile design provides robust pilot to withstand down drafts and environmental conditions
- Easy temperature adjustments
- 90" coaxial vent supplied with water heater
- CoreGard™ magnesium anode with a stainless steel core protects the tank against corrosion
- Blue Diamond® glass coating protects steel tank from corrosion and maximizes tank life
- Factory-installed plastic-lined nipples with heat traps
- Automatic gas control
- CFC-free foam insulation
- 3/4" side taps standard on 50 USG high input model for combination applications
- Suitable for closet installations

SAFETY FEATURES


- Sealed combustion chamber design, eliminates the need for a flammable vapor sensor

SERVICEABILITY

- Easy-to-access combustion chamber
- Conveniently located T&P and drain valve for ease of installation and serviceability
- LED indicator:
 - Gives visual confirmation that pilot is on by flashing continuously
 - Provides diagnostics and troubleshooting
- Piezoelectric ignitor allows for push-button pilot lighting

WARRANTY

- 6 year limited tank and parts warranty
- 2 and 4 year tank warranty extension kits are available




Commercial-Grade Residential Water Heaters

PERFORMANCE

| MODEL | SERIES | CAPACITY | INPUT | MAXIMUM CERTIFIED ALTITUDE | RECOVERY RATE AT 90° F TEMPERATURE RISE | FIRST HOUR RATING | UEF | WARRANTY TANK/PARTS |
|-----------|---------|----------|--------|----------------------------|---|-------------------|------|---------------------|
| | | USG (L) | BTU/h | FT (M) | GPH (LPH) | GPH (LPH) | | YEARS |
| GDV 40L | 300/301 | 40 (151) | 38,000 | 7,700 (2,347) | 42 (159) | 72 (273) | 0.60 | 6/6 |
| GDV 50L | 300/301 | 50 (189) | 40,000 | 7,700 (2,347) | 43 (163) | 91 (344) | 0.66 | 6/6 |
| GDVT 50L* | 300/301 | 50 (189) | 47,000 | 7,700 (2,347) | 51 (193) | 92 (348) | 0.65 | 6/6 |


Natural gas models are series 300. Propane models are series 301. All models comply with national energy efficiency regulations.
*Model has side connections.

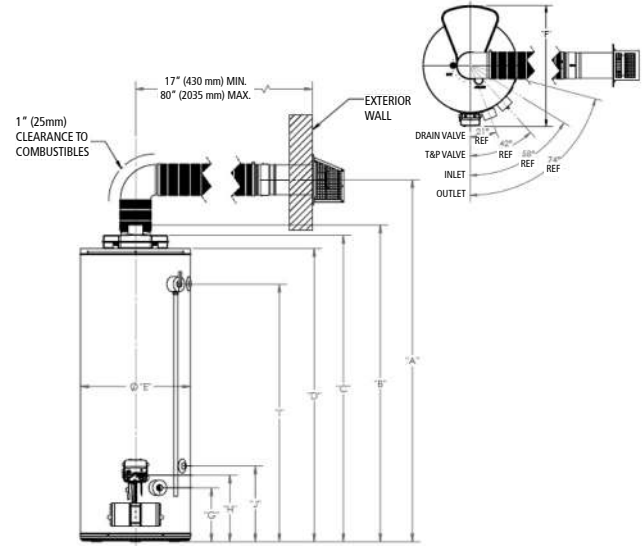


DIMENSIONS & SHIPPING WEIGHT

| MODEL | HEIGHT TO CENTER OF VENT | HEIGHT TO TOP OF FLUE OUTLET | HEIGHT TO TOP OF AIR BOX | HEIGHT TO TOP OF HEATER | DIAMETER | OVERALL DEPTH | HEIGHT TO DRAIN | HEIGHT TO GAS INLET | HEIGHT TO T&P | HEIGHT TO SIDE TAP (HOT OUT) | HEIGHT TO SIDE TAP (COLD IN) | SHIPPING WEIGHT |
|-----------|--------------------------|------------------------------|--------------------------|-------------------------|-----------|---------------|-----------------|---------------------|---------------|------------------------------|------------------------------|-----------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | G IN (CM) | H IN (CM) | I IN (CM) | I IN (CM) | J IN (CM) | LB (KG) |
| GDV 40L | 64 (163) | 54 3/8 (138) | 52 1/2 (133) | 49 3/8 (126) | 22 (56) | 29 (74) | 10 3/4 (27) | 13 1/4 (34) | 42 3/8 (108) | N/A | N/A | 178 (81) |
| GDV 50L | 73 (185) | 63 3/8 (162) | 61 3/4 (157) | 58 3/8 (150) | 22 (56) | 29 (74) | 10 3/4 (27) | 13 1/4 (34) | 51 3/8 (131) | N/A | N/A | 200 (91) |
| GDVT 50L* | 74 (188) | 64 3/8 (164) | 62 3/8 (160) | 60 (152) | 22 (56) | 29 (74) | 10 3/4 (27) | 13 1/4 (34) | 52 3/8 (134) | 52 3/8 (134) | 15 1/4 (39) | 215 (98) |

PREFERRED INSTALLATION

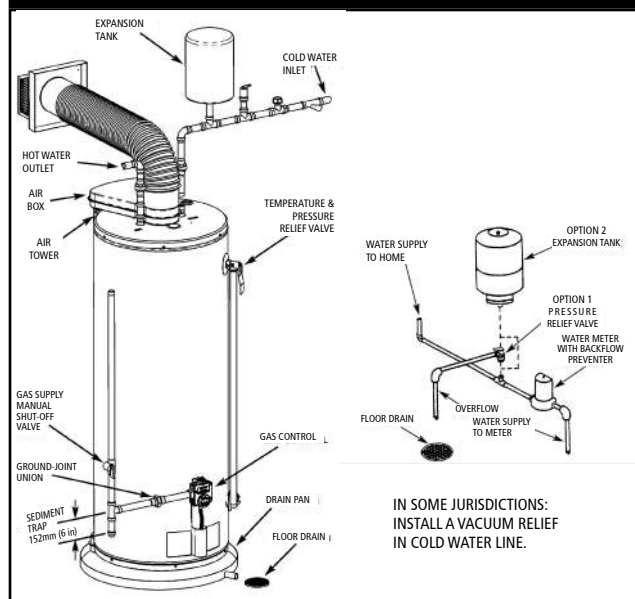

VENT LENGTHS

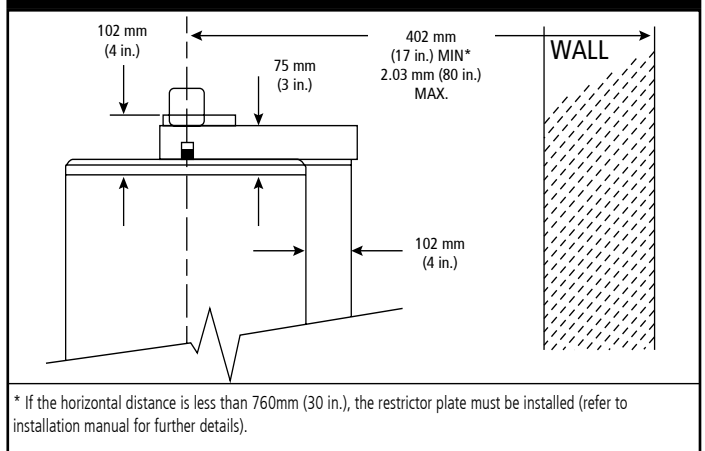

Refer to the installation manual for complete installation and venting requirements.

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

VERTEX® 94% THERMAL EFFICIENCY VERSATILE POWER VENT DESIGN

Today's homes demand more hot water than ever before, and the 94% efficient Vertex power vent gas water heater offers unprecedented levels of performance to meet the need. The 50-gallon Vertex delivers more hot water than a standard 75-gallon atmospheric gas water heater. In fact, the fully condensing Vertex design is so advanced, it delivers hot water shower after shower...at continuous flow of over 3 gallons per minute.* Yet Vertex is easy to install, with height, diameter and installation requirements similar to standard power vent units.

ENERGY STAR® QUALIFIED

HELICAL INTERNAL HEAT EXCHANGER

- Spiral heat exchanger keeps hot combustion gases in the tank longer to lengthen the heat transfer cycle
- Positioned in the center of the tank for more even heat distribution
- Operates at 94% thermal efficiency, which saves money on operating costs compared to a standard 78% efficient gas water heater

POWER VENT DESIGN

- Combined vertical and horizontal runs terminating through an outside wall using ULC S636 PVC, CPVC, or polypropylene pipe
 - 2" pipe, vents up to 25 equivalent feet
 - 3" pipe, vents up to 65 equivalent feet
 - 4" pipe, vents up to 128 equivalent feet

MODULAR BLOWER

- Equipped with 120 volt, 60 Hz electrical system (rating 5 amps or less), 6-foot cord with standard 3-prong connector
- 2" PVC pipe, elbows and condensate drain supplied to connect heat exchanger outlet to blower
- PVC Vent Attenuation Assembly (VAA) supplied

SIDE-MOUNTED HOT AND COLD RECIRCULATING TAPS

- Allows Vertex to be installed as part of combination space heating/water heating applications or any system requiring a recirculating hot water loop, including radiant floor heating

INTELLI-VENT®** GAS CONTROL

- Equipped with nearly indestructible silicon nitride hot surface ignitor — no standing pilot
- Advanced electronics for more precise control of water temperature and easy to understand system diagnostics

BLUE DIAMOND® GLASS COATING TWO HEAVY-DUTY ANODE RODS

- Provide maximum protection against corrosion

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

CODE COMPLIANCE

- Meets the thermal efficiency and standby loss requirements of NRCan and current edition of ASHRAE/IESNA 90.1

DESIGN-CERTIFIED BY UNDERWRITERS LABORATORIES

- Certified at 300 PSI test pressure and 150 PSI working pressure. Listed according to ANSI Z21.10.1 - CSA 4.1 standards governing storage tank-type water heaters

WARRANTY

- 6 year limited tank warranty
 - 6 year limited parts warranty
- For complete information, consult written warranty or A. O. Smith

* 3.21 GPM continuous flow, based on 65°F inlet water temperature, 110°F outlet temperature.

**Intelli-Vent® is a registered trademark of Emerson Electric Company



Residential Condensing Gas Water Heaters

PERFORMANCE



| MODEL | SERIES | CAPACITY | | MAXIMUM CERTIFIED ALTITUDE | INPUT | RECOVERY RATE AT 90°F TEMPERATURE RISE | THERMAL EFFICIENCY | UEF | BC COMPLIANT |
|-------------|--------|----------|-----|-------------------------------|--------|---|-----------------------|------|--------------|
| | | USG | L | | | | | | |
| NATURAL GAS | | | | | | | | | |
| GPHE-50 | 130 | 50 | 189 | 5,300 (1,615) | 76,000 | 96 (364) | 94% | 0.88 | √ |

Available in natural gas only.

DIMENSIONS & SHIPPING WEIGHT

| MODEL | INSTALLATION HEIGHT | HEIGHT TO TOP OF TANK | HEIGHT TO T&P | HEIGHT TO UPPER SIDE CONNECTION | HEIGHT TO LOWER SIDE CONNECTION | HEIGHT TO DRAIN VALVE | HEIGHT TO THERMOSTAT | TANK DIAMETER | HOT CONNECTION TO COLD CONNECTION | WATER CONNECTION DEPTH FROM FRONT OF TANK | OVERALL DEPTH | TOP WATER CONNECTIONS | SIDE WATER CONNECTIONS | SHIPPING WEIGHT |
|-------------|---------------------|-----------------------|---------------|---------------------------------|---------------------------------|-----------------------|----------------------|---------------|-----------------------------------|---|---------------|-----------------------|------------------------|-----------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | G IN (CM) | H IN (CM) | J IN (CM) | K IN (CM) | IN NPT | IN NPT | LB (KG) |
| NATURAL GAS | | | | | | | | | | | | | | |
| GPHE-50* | 71 (180) | 68 5/8 (174) | 52 (132) | 52 (132) | 21 (53) | 9 1/8 (23) | 12 (30) | 22 (56) | 8 (20) | 15 3/4 (40) | 27 (69) | 3/4 | 3/4 | 225 (102) |

*Model has side connections.

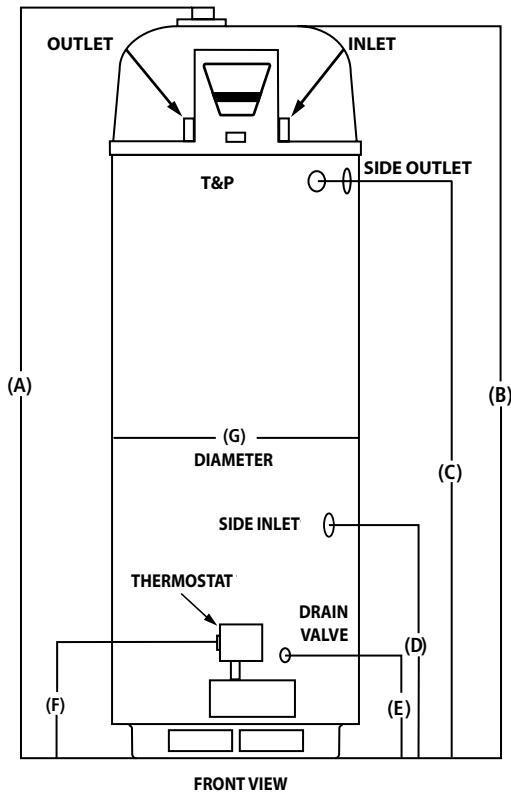

Install in accordance with local codes

VERTEX® 96% THERMAL EFFICIENCY

CONTINUOUS HOT WATER

VERSATILE POWER DIRECT VENT

Today's homes demand more hot water than ever before, and the 96% efficient Vertex power direct vent gas water heaters offer unprecedented levels of performance to meet the need. The fully condensing Vertex design is so advanced, it delivers hot water shower after shower...at a continuous flow of over 4 gallons per minute.*

ENERGY STAR® QUALIFIED

HELICAL INTERNAL HEAT EXCHANGER

- Spiral heat exchanger keeps hot combustion gases in the tank longer to lengthen the heat transfer cycle
- Positioned in the center of the tank for more even heat distribution
- Operates at 96% thermal efficiency, which saves money on operating costs compared to a standard 80% efficient gas water heater

POWER DIRECT VENT DESIGN

- Top fired burner
- Combined vertical and horizontal runs terminating through an outside wall using ULC S636 PVC, CPVC or polypropylene pipe
- 2" pipe, vents up to 45 equivalent feet
- 3" pipe, vents up to 128 equivalent feet

CONDENSING DESIGN

- 96% efficient condensing design
- Equipped with condensate drain tee

SIDE-MOUNTED HOT AND COLD RECIRCULATING TAPS

- Allows Vertex to be installed as part of combination space heating/water heating applications

INTELLIGENT CONTROL SYSTEM WITH TOUCH SCREEN DISPLAY

- Exclusive touch display control system
- Precise temperature control
- Advanced diagnostics

POWERED ANODES STANDARD

- Provides long-lasting tank protection in varying water conditions
- Powered anodes are non-sacrificial
- Automatically adjusts output needed to properly protect the tank

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

AVAILABLE IN NATURAL GAS OR PROPANE

MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

CODE COMPLIANCE

- Meets the thermal efficiency and standby loss requirements of NRCan and current edition of ASHRAE/IESNA 90.1

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 PSI test pressure and 150 PSI working pressure. Listed according to ANSI Z21.10.3 - CSA 4.3 standards governing storage tank-type water heaters

WARRANTY

- 6 year limited tank warranty
- 6 year limited parts warranty

For complete information, consult written warranty or A. O. Smith

Model GDHE-50 *4.31 GPM continuous flow, based on 65°F inlet water temperature, 110°F outlet temperature.



MODEL SHOWN GDHE-75



PERFORMANCE



| MODEL | SERIES | CAPACITY | | MAXIMUM CERTIFIED ALTITUDE | INPUT | RECOVERY RATE AT 90°F TEMPERATURE RISE | THERMAL EFFICIENCY | UEF | BC COMPLIANT |
|-------------|---------|----------|-----|----------------------------------|---------|---|-----------------------|------|--------------|
| | | USG | L | FT (M) | BTU/h | GPH (LPH) | | | |
| NATURAL GAS | | | | | | | | | |
| GDHE-50 | 300/301 | 50 | 189 | 10,100 (3,078) | 100,000 | 128 (485) | 96% | 0.88 | √ |
| GDHE-75 | 300/301 | 75 | 284 | 10,100 (3,078) | 100,000 | 128 (485) | 96% | 0.86 | √ |

Available in Propane (LP) gas. Specify when ordering Propane (LP) gas.
 Natural gas models are series 140. Propane models are series 141.
 Optional Condensate Neutralizer Kit available (Part Number 9007959005).

DIMENSIONS & SHIPPING WEIGHT

| MODEL | HEIGHT TO TOP OF TANK | HEIGHT TO T&P | HEIGHT TO UPPER SIDE CONNECTION | TANK DIAMETER | HEIGHT TO LOWER SIDE CONNECTION | HEIGHT TO DRAIN VALVE | OUTLET TO INLET | TOP WATER CONNECTIONS | SIDE WATER CONNECTIONS | GAS CONNECTION | SHIPPING WEIGHT |
|--------------------|-----------------------|---------------|---------------------------------|---------------|---------------------------------|-----------------------|-----------------|-----------------------|------------------------|----------------|-----------------|
| | A IN (CM) | B IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | IN NPT | IN NPT | IN NPT | LB (KG) |
| NATURAL GAS | | | | | | | | | | | |
| GDHE-50 | 66 ¾ (170) | 49 ¼ (125) | 49 ¼ (125) | 22 (56) | 15 ¾ (40) | 3 (8) | 8 (20) | ¾ | ¾ | ½ | 255 (116) |
| GDHE-75 | 65 ¼ (166) | 45 ⅝ (116) | 45 ⅝ (116) | 27 ¾ (71) | 16 (41) | 3 ¾ (10) | 8 (20) | 1 | ¾ | ½ | 382 (173) |

Inlet and outlet connections: ¾" male for GDHE-50 and 1" for GDHE-75
 Circulation loop connections: ¾" female
 Gas inlet: ½"
 Maximum supply pressure: 14" W.C. (3.48kPa)
 Minimum supply pressure for natural gas: 3.50" W.C. (.87kPa)
 Minimum supply pressure for propane: 8.00" W.C. (1.99kPa)
 Minimum supply pressure must be maintained under both load and no load (dynamic and static) conditions
 Electrical characteristics: 120V, 60Hz, amperes <5

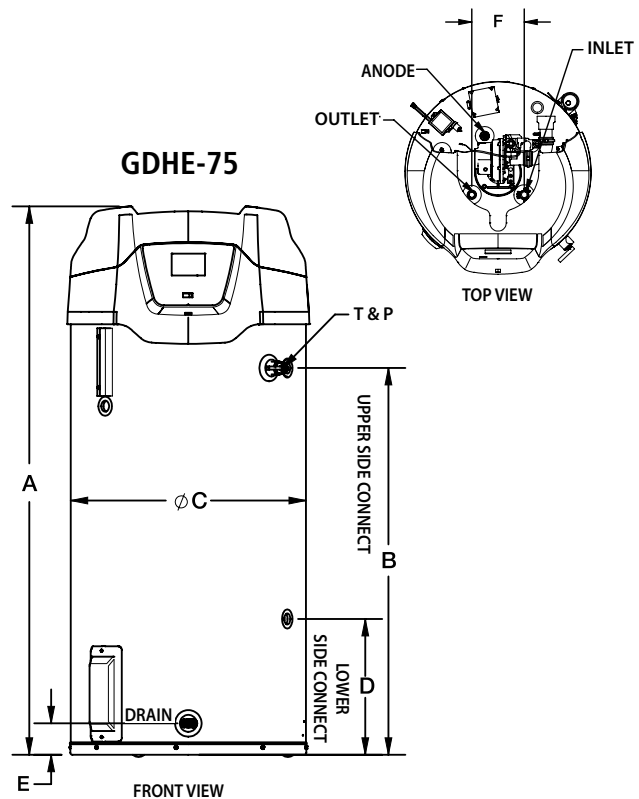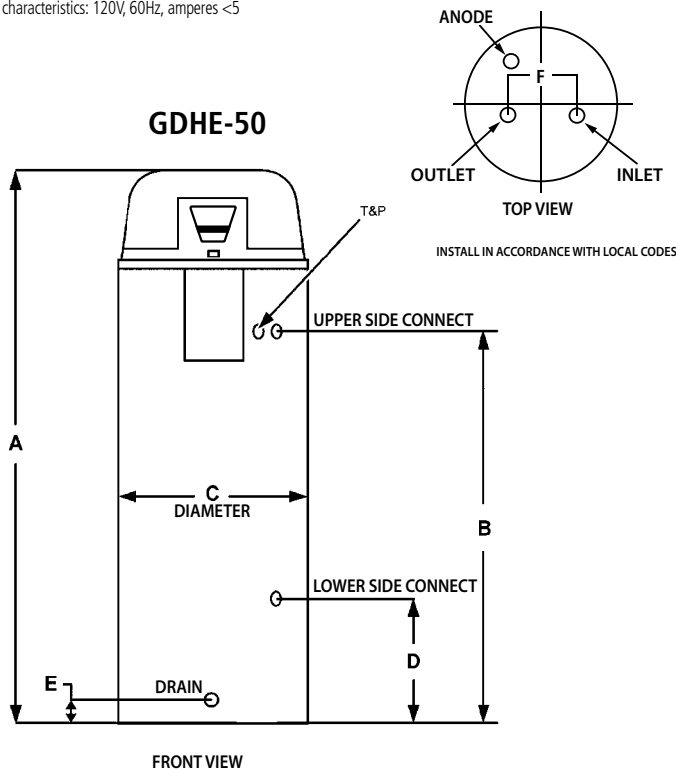

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

VERTEX® HV

Flexible, Powerful & Highly Efficient Gas Water Heater for the Everyday Home.

Commercial-grade hot water delivery is now more attainable than ever. The Vertex™ HV provides flexible, powerful and highly efficient performance to the everyday home. The fully condensing Vertex design is so advanced, it can deliver “continuous hot water for shower after shower” at a constant flow of over 2.5 gallons per minute.*

ENERGY STAR® QUALIFIED

ADVANCED ELECTRONIC CONTROL

- Precise temperature control
- Built-in diagnostics and operational information

CONDENSING DESIGN

- High efficiency operation with up to 0.90 Uniform Energy Factor to save money on operating costs

HELICAL INTERNAL HEAT EXCHANGER

- Spiral heat exchanger keeps hot combustion gases in the tank longer to lengthen the heat transfer cycle
- Positioned in the center of the tank for more even heat distribution
- Spiral design reduces the effect of lime scale and sediment on the heat exchanger to maintain high-efficiency operation over time

POWER VENT AND POWER DIRECT VENT WITH A SINGLE DESIGN

- Combined vertical and horizontal runs terminating through an outside wall. Vents using PVC, CPVC, or polypropylene pipe.
- 2” pipe vents up to 60 equivalent feet
- 3” pipe vents up to 150 equivalent feet

SIDE-MOUNTED HOT AND COLD RECIRCULATING TAPS

- Allows Vertex HV to be installed as part of combination space heating/water heating applications

AVAILABLE IN NATURAL GAS

SIDE FIRED GAS BURNER

- Unique side fire design allows for optimal burner placement

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

HEAVY-DUTY ANODIC PROTECTION

- Comes standard with dual sacrificial anodes to protect the tank
- Optional powered anode available for enhanced tank protection in all water conditions

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

CODE COMPLIANCE

- Meets NRCan and provincial thermal efficiency and standby loss requirements.

DESIGN-CERTIFIED BY CSA

- Certified at 300 psi test pressure and 150 psi working pressure. Listed according to ANSI Z21.10.3 - CSA 4.3 standards governing storage tank-type water heaters.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to hotwater.com

*Continuous hot water based on 65,000 BTU unit, 2.8 GPM continuous flow with a 65°F inlet water temperature, 110°F outlet temperature, and installed per the manufacturer's instructions.



MODEL SHOWN GPCC-40L




Commercial-Grade Residential Water Heaters

| MODEL NUMBER | NORMAL CAPACITY | RATED STORAGE VOLUME | FIRST HOUR RATING | UEF | THERMAL EFFICIENCY | RECOVERY RATE AT 90°F TEMPERATURE RISE | INPUT | SHIPPING WEIGHT |
|--------------|-----------------|----------------------|-------------------|------|--------------------|--|--------|-----------------|
| | USG (L) | USG (L) | GPH (LPH) | | | GPH (LPH) | BTU/h | LB (KG) |
| GPCC-40L | 40 (151) | 39 (147) | 86 (325) | 0.90 | 93% | 62 (234) | 50,000 | 216 (98.2) |
| GPCC-50X | 50 (189) | 48 (181) | 118 (446) | 0.90 | 93% | 81 (306) | 65,000 | 246 (111.8) |


Available in natural gas only.

Top Inlet and outlet connections: 3/4" male NPT. Circulation loop connections: 3/4" female NPT

Models certified for sea level to 10,100 ft. elevation.

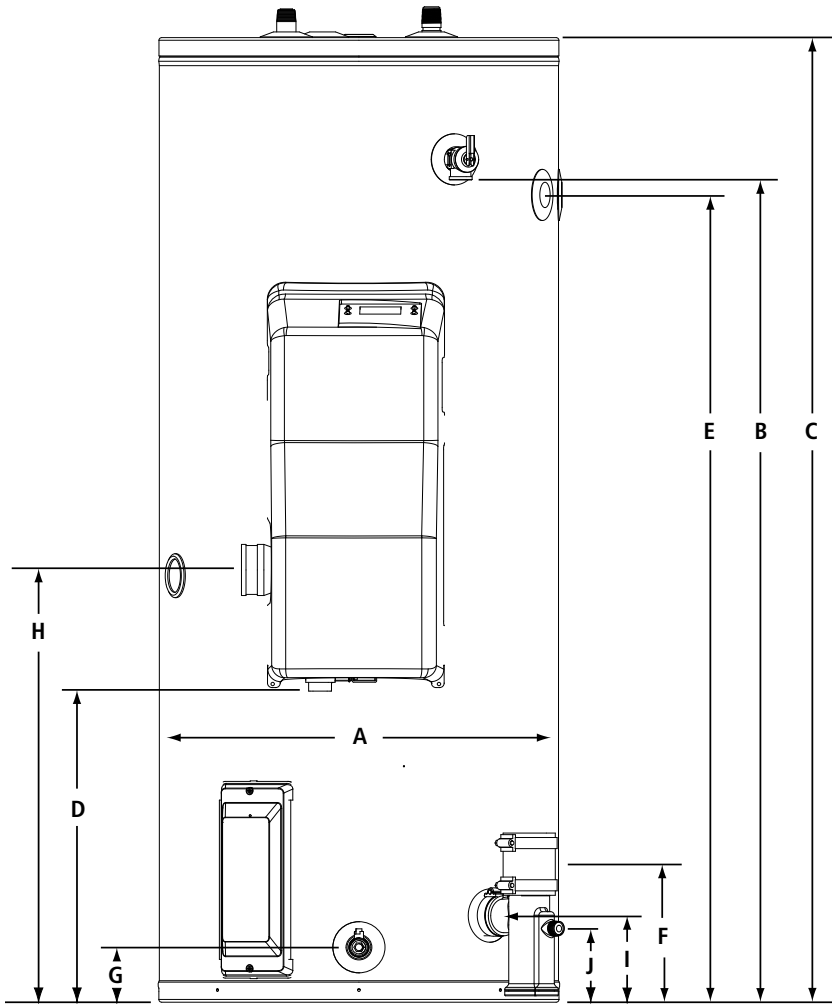

| | DESCRIPTION | DIMENSIONS IN (CM) | |
|---|---------------------------------|--------------------|--------------|
| | | 40 GAL | 50 GAL |
| A | DIAMETER | 22 (56) | 22 (56) |
| B | HEIGHT TO T&P | 38-3/8 (97) | 47-3/8 (120) |
| C | HEIGHT TO TOP | 44-7/8 (114) | 54-1/4 (138) |
| D | HEIGHT TO GAS CONNECTION | 16-1/2 (42) | 17-1/2 (44) |
| E | HEIGHT TO UPPER SIDE CONNECT | 36-3/8 (92) | 45-3/8 (115) |
| F | HEIGHT TO LOWER SIDE CONNECT | 8-5/8 (22) | 7-7/8 (20) |
| G | HEIGHT TO DRAIN VALVE | 3-7/8 (10) | 3 (8) |
| H | HEIGHT TO AIR INTAKE | 22-1/8 (56) | 24-1/4 (62) |
| I | HEIGHT TO EXHAUST | 5-3/8 (14) | 4-7/8 (12) |
| J | HEIGHT TO CONDENSATE CONNECTION | 5-1/2 (14) | 4 (10) |
| K | OVERALL DEPTH | 28-1/2 (72) | 28-1/2 (72) |
| L | WATER CONNECTIONS | 8 (20) | 8 (20) |

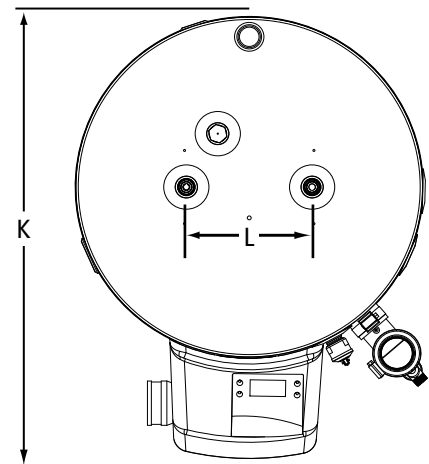

OPTIONAL ACCESSORIES

| PART NUMBER | DESCRIPTION |
|-------------|--------------------------------|
| 100112869 | 2" concentric termination kit |
| 100111100 | 3" concentric termination kit |
| 100187903 | 2" low-profile termination kit |
| 100187887 | 3" low-profile termination kit |
| 100112159 | Condensate neutralizer kit |
| 100305721 | Powered anode kit |

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.



Polaris™ High-Efficiency Residential Gas Water Heater

The Polaris high efficiency gas water heater is the high performance answer for today's hot water needs. It can provide endless hot water* and can be used for a combination of domestic hot water and space heating.

CONDENSING DESIGN

- Operates at up to 96% thermal efficiency which saves money on operating costs compared to a standard 80% efficient gas water heater
- Helical internal heat exchanger keeps hot combustion gases in the tank longer to transfer more heat into the water

STAINLESS STEEL CONSTRUCTION

- Tank and helical heat exchanger are constructed from 444 stainless steel for excellent corrosion resistance without the need for an anode

WHISPER QUIET OPERATION

- Ultra quiet blower and burner to minimize noise

POWER DIRECT VENT DESIGN

- Direct vent using ULC S636, PVC, CPVC or Polypropylene (solid core only) through a sidewall or roof
- Optional concentric vent kit
- 2" pipe vents up to 52 equivalent feet (100-150k BTU/h inputs)
- 3" pipe vents up to 130 equivalent feet

ADVANCED ELECTRONIC CONTROL

- Large touchscreen display
- Precise temperature control
- Advanced water heater status and diagnostics

MODULATING GAS BURNER

- Modulating burner maintains high efficiency operation at lower input rates

SIDE-MOUNTED HOT AND COLD RECIRCULATING TAPS

- Polaris can be easily installed with a recirculation system or as part of a combined domestic & space heating system

FULLY SERVICEABLE FROM THE FRONT

- Two front access panels expose all serviceable components. Modular components are all easily removed

AVAILABLE IN NATURAL GAS OR PROPANE

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

10-YEAR LIMITED TANK AND 1-YEAR PARTS WARRANTY

*When sized appropriately. Model PR50-199 can deliver 6.95 GPM continuous flow, based on 65°F inlet water temperature, 120°F outlet temperature.



POLARIS

Polaris™ High-Efficiency Residential Gas Water Heater

PERFORMANCE

| Model | Series | Capacity | | Maximum Certified Altitude | Input | Recovery Rate at 90°F Temperature Rise | Thermal Efficiency | Warranty Tank/Parts |
|--------------------|--------|----------|-----|----------------------------|---------|--|--------------------|---------------------|
| | | USG | L | | | | | |
| | | | | FT (M) | BTU/h | GPH (LPH) | | Years |
| NATURAL GAS | | | | | | | | |
| PR 34-100 N | 200 | 34 | 129 | 7,700 (2,437) | 100,000 | 129 (488) | 96% | 10/1 |
| PR 34-130 N | 200 | 34 | 129 | 7,700 (2,437) | 130,000 | 168 (636) | 96% | 10/1 |
| PR 34-150 N | 200 | 34 | 129 | 7,700 (2,437) | 150,000 | 190 (719) | 94% | 10/1 |
| PR 50-130 N | 200 | 50 | 189 | 7,700 (2,437) | 130,000 | 165 (625) | 95% | 10/1 |
| PR 50-150 N | 200 | 50 | 189 | 7,700 (2,437) | 150,000 | 190 (719) | 95% | 10/1 |
| PR 50-175 N | 200 | 50 | 189 | 7,700 (2,437) | 175,000 | 222 (840) | 96% | 10/1 |
| PR 50-199 N | 200 | 50 | 189 | 7,700 (2,437) | 199,000 | 253 (958) | 96% | 10/1 |



For propane models sub N with P. Natural gas models are series 200. Propane models are series 201. All models comply with national energy efficiency regulations. Input, output and recovery may vary depending upon air inlet and exhaust outlet installations, consult manual for details.

DIMENSIONS & SHIPPING WEIGHT

| Model | Height to Top of Tank | Tank Diameter | Height to Heating System Return | Height to Cold Water Inlet | Height to Heating System Outlet | Height to T&P | Height to Gas Supply | Height to Air Inlet | Water Connections | Gas Connections | Vent Diameter | Shipping Weight |
|--------------------|-----------------------|---------------|---------------------------------|----------------------------|---------------------------------|---------------|----------------------|---------------------|-------------------|-----------------|---------------|-----------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | C IN (CM) | D IN (CM) | E IN (CM) | F IN (CM) | G IN (CM) | IN NPT | IN NPT | IN | LB (KG) |
| NATURAL GAS | | | | | | | | | | | | |
| PR 34-100 N | 48 ½ (123) | 22 (56) | 15 ¾ (40) | 15 ¾ (40) | 40 ½ (103) | 41 (104) | 6 ¾ (16) | 6 ¾ (16) | 1 | ½ | 2 or 3 | 150 (68) |
| PR 34-130 N | 48 ½ (123) | 22 (56) | 15 ¾ (40) | 15 ¾ (40) | 40 ½ (103) | 41 (104) | 6 ¾ (16) | 6 ¾ (16) | 1 | ½ | 2 or 3 | 150 (68) |
| PR 34-150 N | 48 ½ (123) | 22 (56) | 15 ¾ (40) | 15 ¾ (40) | 40 ½ (103) | 41 (104) | 6 ¾ (16) | 6 ¾ (16) | 1 | ½ | 2 or 3 | 150 (68) |
| PR 50-130 N | 62 ¾ (158) | 22 (56) | 15 ¾ (40) | 15 ¾ (40) | 54 ½ (138) | 55 (140) | 6 ¾ (16) | 6 ¾ (16) | 1 | ½ | 2 or 3 | 176 (80) |
| PR 50-150 N | 63 ¾ (162) | 22 (56) | 15 ¾ (40) | 15 ¾ (40) | 55 ¾ (142) | 56 ¼ (143) | 6 ¾ (16) | 6 ¾ (16) | 1 | ½ | 2 or 3 | 180 (82) |
| PR 50-175 N | 63 ¾ (162) | 22 (56) | 15 ¾ (40) | 15 ¾ (40) | 55 ¾ (142) | 56 ¼ (143) | 6 ¾ (16) | 6 ¾ (16) | 1 | ½ | 3 | 180 (82) |
| PR 50-199 N | 63 ¾ (162) | 22 (56) | 15 ¾ (40) | 15 ¾ (40) | 55 ¾ (142) | 56 ¼ (143) | 6 ¾ (16) | 6 ¾ (16) | 1 | ½ | 3 | 180 (82) |

OPTIONAL KITS

| Description | Part Number |
|------------------------|-------------|
| 2" Concentric vent kit | 100093946 |
| 3" Concentric vent kit | 100093947 |

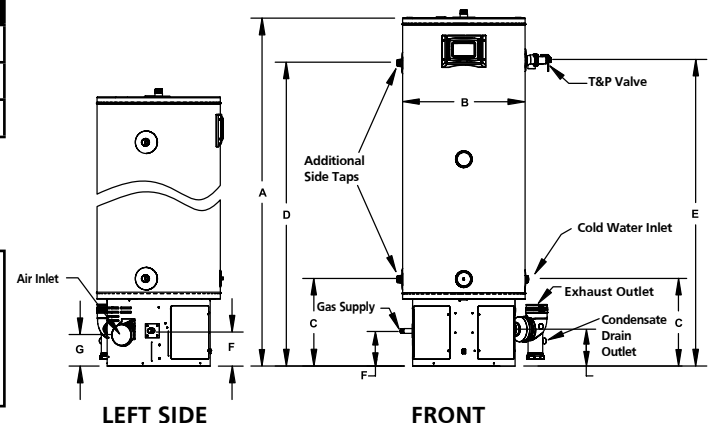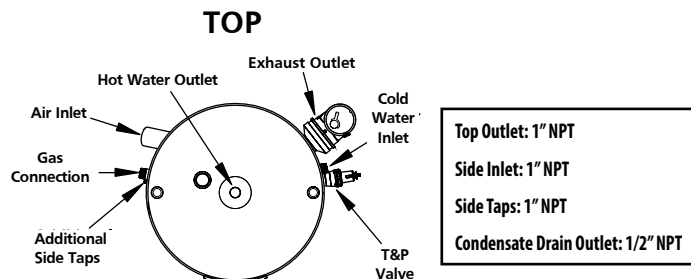

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

POLR100 (01-23)

Powered by **TAKAGI**

The A. O. Smith powered by Takagi condensing tankless water heaters provide endless hot water.* The durable primary heat exchanger is made of commercial-grade copper while the secondary heat exchanger is made of Type 316L stainless steel, preventing corrosion and prolonging the life of the heater. These direct vent models combine durability and versatility in an easy-to-install space-saving design.



Features of Condensing Tankless Models:

- Integrated temperature and error display
- Advanced safety features
- ULC S636 PVC, CPVC, polypropylene pipe or Cat. III/IV stainless steel venting
- Internal freeze protection system
- New 540P model with integrated recirculation pump

*When sized appropriately



Point of Use Electric Tankless Water Heaters

EASY TO INSTALL

- Compact size for installations with space constraints
- Wall mount vertically or horizontally
- ¾" NPT water connections (1/2" NPT reducers included)

DRY-FIRE PROTECTION

- Prevents element failure due to dry-fire
- Internal air bypass
- Temporary shutoff with excess air in chamber

SCALE-REDUCTION TECHNOLOGY

- Reduces failures and service requirements due to scale build-up
- Power-sharing technology reduces scale deposits on elements
- Dupont™ Zytel® chambers resist scale buildup

DIGITAL USER INTERFACE (2-CHAMBER MODEL)

- Easy temperature adjustment
- Error codes are clearly displayed

WARRANTY

- 6-year limited chamber warranty
- 1-year limited parts warranty



| SPECIFICATIONS | | | | | | | | | | | | |
|---------------------------------------|--------|--------|-------|----------|--------------------------|------------------------|----------------|------------------------|-----------|-----------|-----------|-----------------|
| Model | Series | Input | | Amp Load | Recommended Breaker Size | Recommended Wire Gauge | Activation GPM | Flow Rate at 70°F Rise | Height | Depth | Width | Shipping Weight |
| | | WATTS | VOLTS | AMP | | | | GPM (LPM) | A IN (CM) | B IN (CM) | C IN (CM) | LB (KG) |
| SINGLE CHAMBER, SINGLE ELEMENT MODELS | | | | | | | | | | | | |
| SSET-70E | 100 | 7,000 | 240 | 29 | 40 Amp | 8 | 0.25 | 0.7 (2.6) | 15 ½ (39) | 6 ½ (17) | 7 (18) | 9 (4) |
| SSET-90E | 100 | 9,000 | 240 | 38 | 50 Amp | 8 | 0.25 | 0.9 (3.4) | 15 ½ (39) | 6 ½ (17) | 7 (18) | 9 (4) |
| TWO CHAMBER, TWO ELEMENT MODEL | | | | | | | | | | | | |
| SSET-180E | 100 | 18,000 | 240 | 75 | 50 Amp x 2 | 8 | 0.25 | 1.8 (6.8) | 16 ⅝ (42) | 6 ⅞ (16) | 11 ½ (29) | 20 (9) |

For Technical Information call 888-599-2837. A. O. Smith Enterprises Ltd. reserves the right to make product changes or improvements without prior notice.

ADAPT™ PREMIUM CONDENSING TANKLESS WITH X3™ SCALE PREVENTION TECHNOLOGY & INTEGRATED RECIRC PUMP

Introducing A. O. Smith's ADAPT™ premium condensing gas tankless water heaters, delivering robust, on-demand performance and the flexibility to install in practically any residential setting.

FEATURES:

X3™ SCALE PREVENTION TECHNOLOGY (PATENTED DESIGN)

- Units maintain like-new performance longer and life extended by up to 3x versus unprotected units
- Eliminates need for annual descaling
- Included with all X3 models, optional accessory for M (bypass) models

HEAVY-DUTY STAINLESS STEEL HEAT EXCHANGER DESIGN

- Single heavy-duty stainless steel heat exchanger design minimizes internal welds and improves overall reliability
- More resilient to scale buildup and corrosion

INTEGRATED RECIRCULATION PUMP & DISPLAY

- Integrated recirculation pump
- Built-in Control Display to set and review recirc schedules, status, and error codes

PERFORMANCE & EFFICIENCY

- 160,000, 180,000, 199,000 BTU/h models
- 9,000 BTU/h min. input
- 22:1 turndown ratio on 199,000 BTU/h models
- 10.5 GPM maximum flow rate
- 0.4 GPM activation flow rate
- 0.95 UEF, ENERGY STAR® certified
- Ultra Low NOx: NOx emissions less than 14 ng/J or 20 ppm for natural gas and less than 77 ppm for propane

ULTIMATE FLEXIBILITY EASE OF INSTALLATION

- Field convertible from natural gas to LP (kit included with unit)
- Vent up to 75' (23 m) with 2" pipe or up to 150' (46 m) with 3" pipe
- Cat. IV venting may be used
- Vent with ULC S636 certified PVC, CPVC, or polypropylene pipe
- X3 models include pressure relief valve
- Outdoor rated power cord standard on every unit
- Cascade up to 12 units (cable included with unit)

LIMITED WARRANTY

- No hard water exclusions on X3 models (exclusions apply to M models even with the addition of the optional X3 cartridge)
- 15-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on all parts in residential applications
- 1-year limited warranty on heat exchanger and parts in commercial applications



**ATHR-160X3, ATHR-180X3,
ATHR-199X3**
X3 Scale Prevention
Technology included



**ATHR-160M, ATHR-180M,
ATHR-199M**
X3 Scale Prevention Technology
can be added at any time
(optional accessory)



CSA/ANSI Z21.10.3 • CSA 4.3

Commercial-Grade Residential Gas Water Heaters

| | | ATHR-160M | ATHR-160X3 | ATHR-180M | ATHR-180X3 | ATHR-199M | ATHR-199X3 |
|----------------------------------|--------------------|---|----------------|--------------------|----------------|--------------------|----------------|
| Installation Type | | Indoor / Outdoor* | | Indoor / Outdoor* | | Indoor / Outdoor* | |
| X3™ Scale Prevention Technology | | Optional Accessory | Included | Optional Accessory | Included | Optional Accessory | Integrated |
| Recirculation Pump | | Integrated | | | | | |
| Input Rate | Minimum | 9,000 BTU/h | | | | | |
| | Maximum | 160,000 BTU/h | | 180,000 BTU/h | | 199,000 BTU/h | |
| Fuel Type | | Natural Gas (Field Convertible to Liquid Propane, Kit Included) | | | | | |
| Heat Exchanger | | Stainless Steel | | | | | |
| Uniform Energy Factor (UEF) | | 0.95 | | | | | |
| Maximum Flow Rate** | | 10.5 GPM | | | | | |
| Activation Flow Rate | | 0.4 GPM | | | | | |
| Continuous Fire Flow Rate | | 0.26 GPM | | | | | |
| Water Pressure Min. - Max. | | 15 - 150 PSI (40 PSI Recommended for Maximum Flow) | | | | | |
| Supply Gas Pressure (NG) | Min. in W.C. (kPa) | 3.5 (0.9) | | | | | |
| | Max. in W.C. (kPa) | 10.5 (2.6) | | | | | |
| Supply Gas Pressure (LP) | Min. in W.C. (kPa) | 8.0 (2) | | | | | |
| | Max. in W.C. (kPa) | 13.0 (3.2) | | | | | |
| Hot/Cold Connections | | 3/4" NPT | | | | | |
| Gas Connection | | 1/2" NPT | | | | | |
| Temperature Settings Min. - Max. | | 100°F (38°C) - 140°F (60°C); Default 120°F (49°C) | | | | | |
| Ignition System | | Electronic Ignition | | | | | |
| Power Supply | | 120V, 50Hz/60Hz, <5A | | | | | |
| Sound Level | | 50.3 dB** | | | | | |
| Elevation | | Certified from Sea Level to 10,100' (3,078.5 m) | | | | | |
| Freeze Protection+ | | - 5°F (-21°C) | | | | | |
| Venting - Exhaust, Intake | Type | Power Direct Vent | | | | | |
| | Size, Max Run | 2", 75' (5 cm, 22.9 m); 3", 150' (8 cm, 45.7 m) | | | | | |
| | Material | ULC S636 certified PVC, CPVC, or polypropylene | | | | | |
| Unit Dimensions | Height*** | 33.8" (86 cm) | 44.6" (113 cm) | 33.8" (86 cm) | 44.6" (113 cm) | 33.8" (86 cm) | 44.6" (113 cm) |
| | Width | 16.5" (42 cm) | | | | | |
| | Depth | 16.1" (41 cm) | | | | | |
| | Weight | 104 lb. (47 kg) | | | | | |
| Shipping Dimensions**** | Height | 20.8" (53 cm) | | | | | |
| | Width | 22.3" (57 cm) | | | | | |
| | Depth | 40" (102 cm) | | | | | |
| | Weight | 125 lb (57 kg) | | | | | |

All models are ENERGY STAR® certified.

* Outdoor installations require outdoor vent cap kit (100369060) sold separately.

** Based on factory settings.

*** Height from flue collar to top of X3 scale control media cartridge on X3 models and to top of manifold cartridge on M models.


**** Packaged and shipped on unit back.

† Internal freeze protection for heater only; Freeze protection for the X3 and bypass cartridges (kits sold separately) is recommended for outdoor installations.


Included with Heater: Manual, Pressure Relief Valve (X3 models only), Wall Mounting Bracket and Hardware, Vent Port Screws, Cascading Cable, Fuel Conversion Kit, Bird Screens

ARESS00523


Commercial-Grade Residential Gas Water Heaters

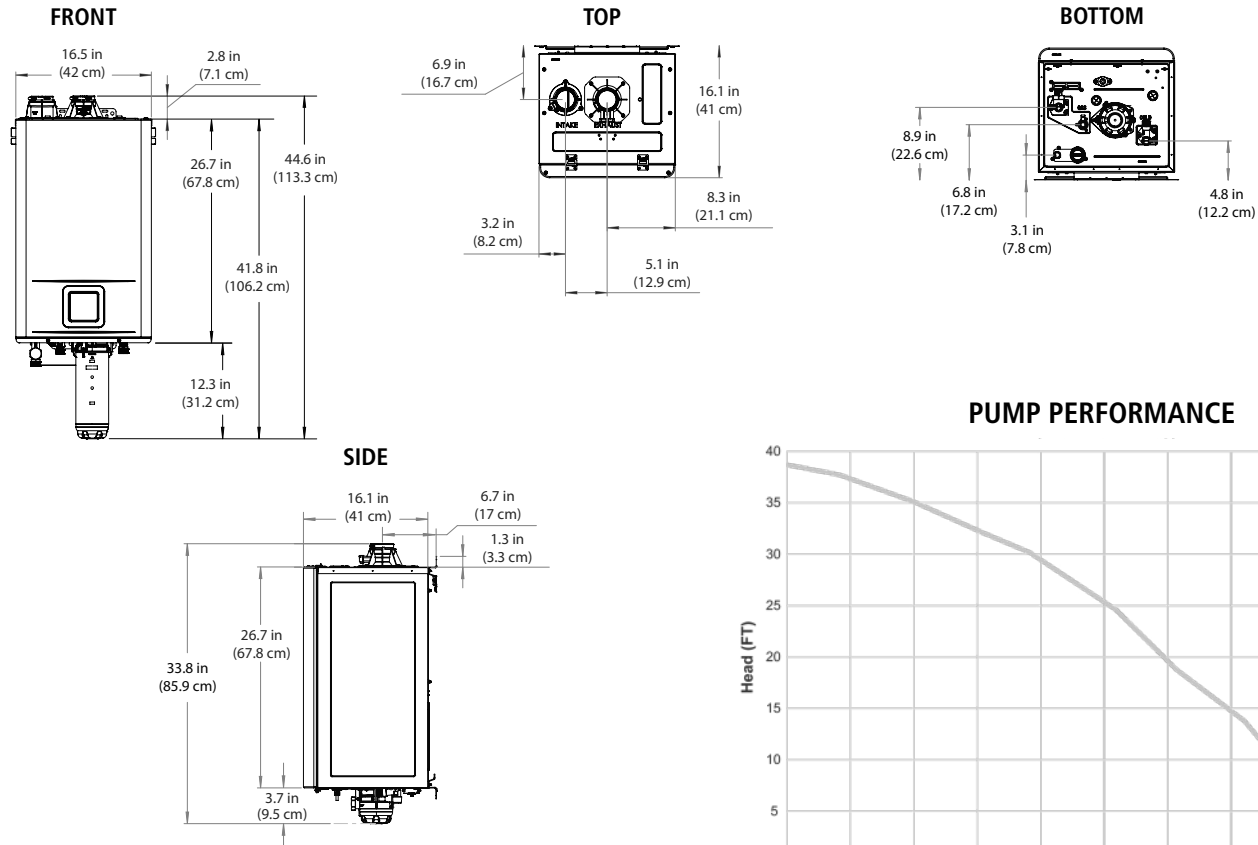


PUMP PERFORMANCE

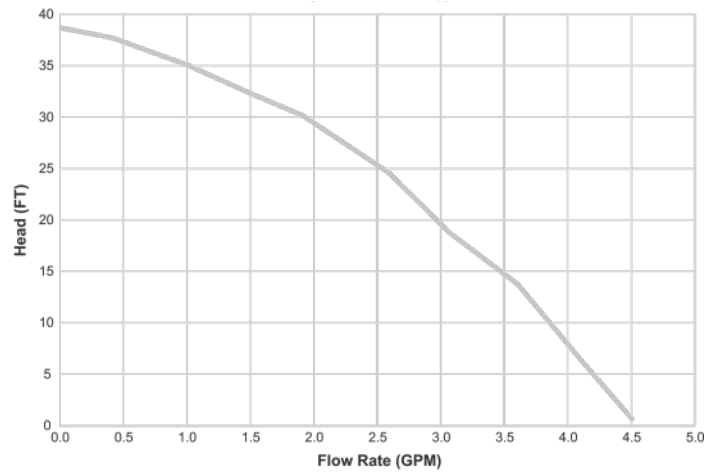











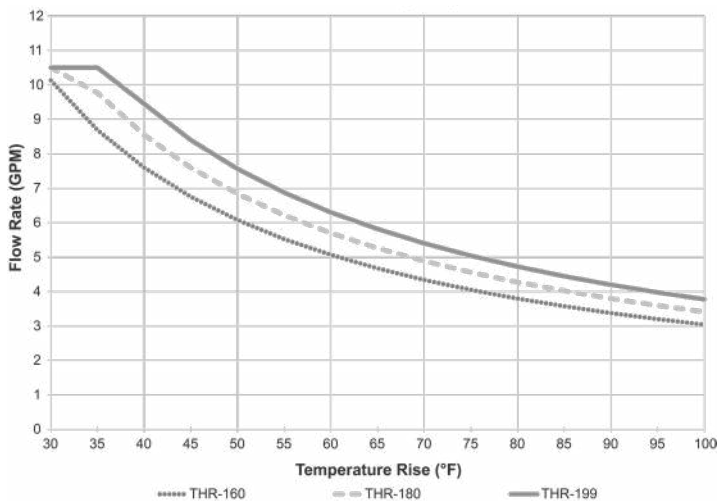



FLOW RATE

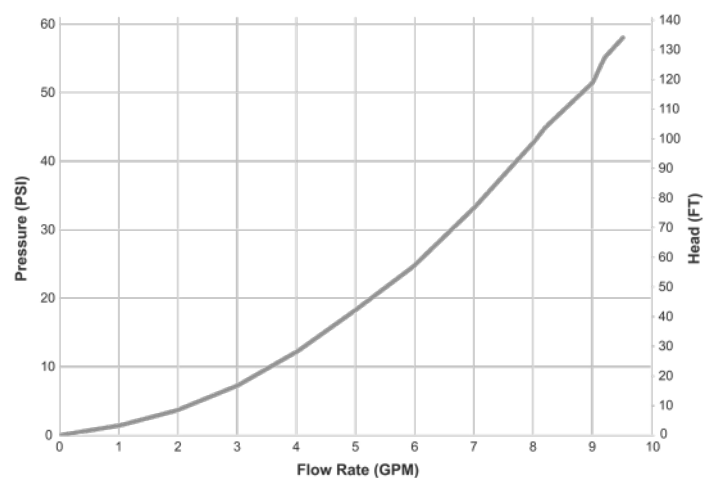

PRESSURE LOSS



| Item | Material Number | | Description |
|--|-----------------|---|--|
| X3 Cartridge | 100368986 |  | Add to an M model heater to prevent scale buildup and eliminate the need for annual descaling. |
| Wi-Fi Module Kit | 100371922 |  | Wi-Fi Module for electronically connecting tankless water heaters to the internet and adapter to connect to the water heater. Kit contains: Module (1x), Cable (1x), Adapter (1x) |
| Remote Temperature Controller | 100371898 |  | Remote Temperature Controller with 10' (3 m) cable. |
| Communication Cable - 10' (3 m) | 100371889 |  | Replacement 10' (3 m) Communication Cable for Remote Temperature Controller, WiFi Module, or On-Demand Receiver. |
| Communication Cable - 32' (10 m) | 100371900 | | Extended 32' (10 m) Communication Cable for Remote Temperature Controller, WiFi Module, or On-Demand Receiver. |
| Remote Recirculation Kit - Two Buttons | 100371920 |  | Remote Recirculation Kit activates the water heater and recirculation at a touch of a button for on-demand hot water. Kit contains: Receiver (1x), Buttons (x2) |
| Remote Recirculation Kit - Three Buttons | 100371921 |  | Remote Recirculation Kit activates the water heater and recirculation at a touch of a button for on-demand hot water. Kit contains: Receiver (1x), Buttons (x3) |
| Individual Spare Button | 100371913 |  | Add Remote Recirculation Buttons to a system to a maximum of 30. |
| X3 Freeze Protection (X3 Models) | 100325654 |  | Freeze Protection for the X3 cartridge for outdoor installations. Cartridge is not protected by the water heater's internal freeze protection. |
| Bypass Freeze Protection (M Models) | 100371918 |  | Freeze Protection for the bypass cartridge for outdoor installations. Cartridge is not protected by the water heater's internal freeze protection. |
| Pipe Cover | 100374697 |  | Pipe Cover protects plumbing connections to the heater while improving the appearance of the installation. Affixes to bottom of heater. |
| Neutralizer Assembly Kit | 100112159 |  | Neutralizer Assembly neutralizes the condensate (acidic water) that forms in the heat exchanger of the water heater. It connects to the condensate drain port of the water heater by using connectors included with the neutralizer kit. |
| Outdoor Vent Cap Kit | 100369060 |  | Vent cap kit and accessories for installing the tankless heater outdoors. Kit contains: Vent Cap (1x), User Interface Overlay (1x) |
| Isolation Valve Kit with Pressure Relief Valve | 100112156 |  | Isolation Valves help control water flow during routine maintenance. Pressure Relief Valve limits pressure in the water heater. X3 models include a pressure relief valve. |
| Cross Over Valve Kit | 100327167 |  | For systems without a dedicated return line necessary. Install at the faucet furthest from the hot water heater. |

TANKLESS HIGH EFFICIENCY CONDENSING MODELS

FEATURES

DESIGNED FOR PERFORMANCE

- Condensing technology provides UEF of up to 0.94
- Primary heat exchanger is constructed of commercial-grade copper which is more resilient against erosion
- Secondary heat exchanger is made of Type 316L Stainless Steel to protect against corrosion
- Continuous maximum flow rates up to 10.0 GPM
- Available in natural gas (NG) or propane (LP)
- Electronic ignition - no pilot light
- Includes a built-in temperature controller and advanced diagnostics for easy troubleshooting
- Factory-installed power cord
- New 540P model with integrated recirculation pump
- Easy-Link up to 4 units with no additional parts or accessories needed using built-in Easy-Link System (540 models only)
- Multi-link up to 20 units (540 models only) with a multi-unit controller
- Internal freeze protection system

SAFETY FEATURES

- Air-Fuel Ratio (AFR) Sensor
- Exhaust & water temperature safety control
- Overheat cut-off fuse

POWER DIRECT VENT DESIGN

- Exhaust, 3" venting up to 70 equivalent feet or 4" venting up to 100 equivalent feet
- Provides flexible venting with ULC S636 approved PVC, CPVC or polypropylene pipe for intake and exhaust (solid core only)
- Category III/IV Stainless Steel venting can also be used

WARRANTY

- 15-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on heat exchanger in commercial applications
- 5-year limited warranty on all parts



ATI-240H
ATI-340H




ATI-540P



540H model only


ANSI Z21.10.3 CSA 4.3

FLOW RATE vs TEMPERATURE RISE

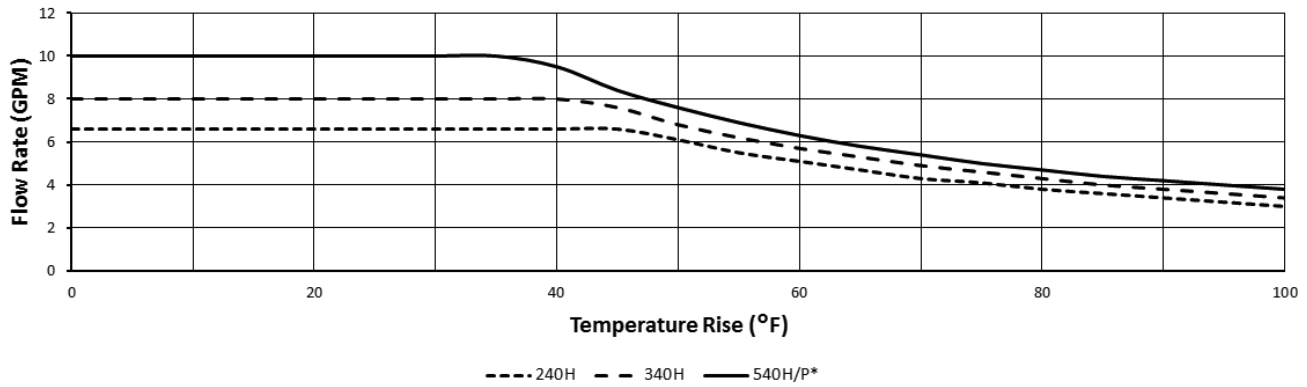

*Maximum flow rate with set temperature above 130°F (55°C) is 8.0 GPM.

PRESSURE LOSS vs FLOW RATE

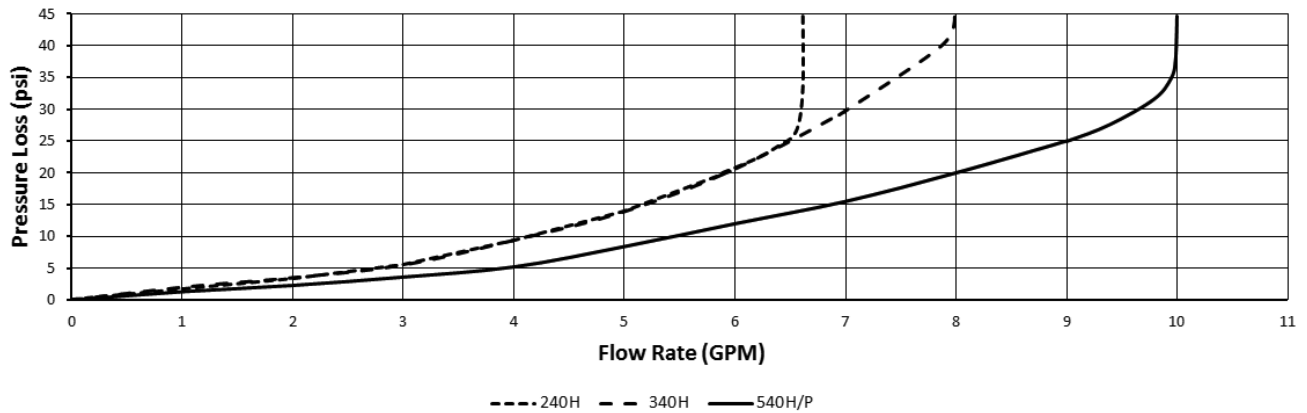



Residential Gas Tankless Water Heaters

Optional Accessories

| PART NUMBER | DESCRIPTION |
|-------------|---|
| 100112163 | Concentric termination kit |
| 100112159 | Condensate neutralizer kit |
| 100209924 | Remote temperature controller for temperatures up to 167°F (240H/340H/540H models only) |
| 100112572 | Remote temperature controller for temperatures up to 185°F (540H models only) |
| 100276687 | Remote temperature controller for temperatures up to 140°F (540P only) |
| 100112691 | Multi-unit controller (540H/P models only) |
| 100112156 | Isolation valve kit (with Pressure Relief Valve) |
| 100112718 | Pipe cover |
| 100113154 | Product Preservers® Anti-Scale System |
| 100113130 | Non-return valve for Common Vent Systems |

SAMPLE SPECIFICATION

Water heater(s) shall be A. O. Smith tankless water heater model _____, having a maximum input rating of _____ BTU/h. The heater shall have ¾" male NPT water and gas connections. The inlet gas supply pressures shall be _____ in. WC (minimum) up to _____ in. WC (maximum) for _____ fuel. The heater(s) shall incorporate an integrated temperature controller that will provide heater set temperature, diagnostic, and fault history information.

The water heater(s) shall be vented with 3" or 4" ULc S636 approved Schedule 40 PVC or CPVC, polypropylene, or Category IV vent pipe with a length not to exceed 70' (equivalent) for 3" vent or 100' (equivalent) for 4" vent, terminating horizontally or vertically. The intake air pipe may be of such material as PVC or CPVC, ABS, polypropylene, aluminum, or Category IV pipe and cannot exceed 70' (equivalent) for 3" pipe or 100' for 4" pipe.

The water heater(s) shall use a commercial grade copper alloy, fin tube primary heat exchanger with quick release brass or bronze waterways, and a 316L stainless steel secondary heat exchanger. The heater(s) shall be controlled by an onboard solid-state printed circuit board using thermistors to monitor inlet and outlet water temperature and exhaust temperature, a flow sensor to measure flow rate, a flame sensor to monitor combustion, and an air-fuel ratio rod to measure and adjust operation in order to maintain optimal combustion efficiency. The heater(s) shall also consist of inline fusing and surge absorbers for electrical surge protection, an electronic spark igniter, aluminized stainless steel burners, hi-limit temperature switch to monitor water temperature, modulating gas valve, and an overheat cutoff fuse. The heater(s) shall include an exhaust temperature monitoring system using an exhaust thermistor and automatic hi-limit switch to maintain safe exhaust temperatures for Schedule 40 PVC and incorporate ceramic heating blocks and an auto-fire system for freeze protection of the heat exchanger and water piping.

The water heater(s) shall be design certified by CSA according to ANSI Z21.10.3 · CSA 4.3 and meet the energy efficiency requirements of NRCan and the current edition of ASHRAE 90.1.

Appendices

Reference Calculations and Conversions for Electricity

Ohm's Law


Ohm's Law defines the relationships between (P) power, (E) voltage, (I) current, and (R) resistance. One ohm is the resistance value through which one volt will maintain a current of one ampere.

(I) Current is what flows on a wire or conductor like water flowing down a river. Current flows from points of high voltage to points of low voltage on the surface of a conductor. Current is measured in (A) amperes or amps.

(E) Voltage is the difference in electrical potential between two points in a circuit. It's the push or pressure behind current flow through a circuit, and is measured in (V) volts.

(R) Resistance determines how much current will flow through a component. Resistors are used to control voltage and current levels. A very high resistance allows a small amount of current to flow. A very low resistance allows a large amount of current to flow. Resistance is measured in ohms.

(P) Power is the amount of current times the voltage level at a given point measured in wattage or watts.

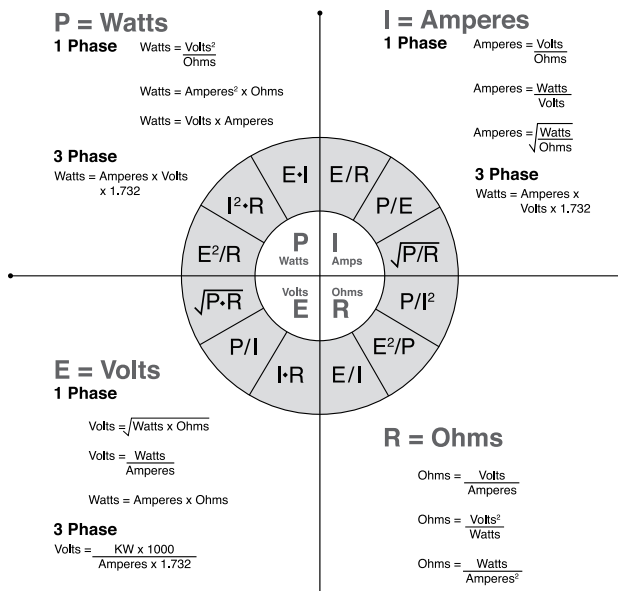

Reference Guide for Water Heating

One US gallon of fresh water weighs 8.333 lb.

Water expands 4.34% heated from 40° to 212° F.

1 BTU = Amount of heat required to raise the temperature of 1 lb. of water 1° F.

$$\text{Recovery GPH (Electric)} = \frac{\text{KW} \times 3412}{8.33 \times \Delta T}$$

$$\text{Recovery GPH (Gas)} = \frac{\text{Input} \times \text{Efficiency}}{8.33 \times \Delta T}$$

$$\text{Req. BTU Input} = \frac{\text{Water Heater Capacity} \times 8.33 \times \Delta T}{\% \text{ Efficiency}}$$

First Hour Draw (FHD)

$$\text{FHD} = (\text{Storage} \times \% \text{ Efficiency}) + \text{Recovery}$$

% of hot and cold water needed to be mixed to obtain a desired temperature

$$\text{Hot water percentage} = \frac{M - C}{H - C}$$

$$\text{Cold water percentage} = \frac{H - M}{H - C}$$

Water C = Cold Water Temperature
H = Hot Water Temperature
M = Mixed Water Temperature

$$\% \text{ Efficiency} = \frac{\text{GPH} \times 8.33 \times \text{Temp. Rise}}{\text{BTU/Hr. Input}}$$

Appendices

Reference Guide for Water Heating

BTU/Output = GPH x 8.33 lbs./Gal. x Temp. Rise

BTU/Input = $\frac{\text{GPH} \times 8.33 \times \text{Temp. Rise}}{\% \text{ Efficiency}}$

KW = $\frac{\text{GPH} \times 8.33 \times \text{Temp. Rise}}{3413}$

Temperatures

To convert from degrees Centigrade (C) to degrees Fahrenheit (F) multiply the number of degrees C by 9/5 (or 1.8) and add 32.

To convert from degrees Fahrenheit (F) to degrees Centigrade (C) first subtract 32 from the number of degrees F then multiply the remainder by 5/9 (or 0.556).

Gas

| Gas | | BTU |
|---------------------------|---|---------|
| 1 lb. of Butane | = | 21,300 |
| 1 Gal. of Butane | = | 102,600 |
| 1 Cu. Ft. of Butane | = | 3,260 |
| 1 Cu. Ft. of Manufactured | = | 530 |
| 1 Cu. Ft. of Mixed | = | 850 |
| 1 Cu. Ft. of Natural | = | 1,075 |
| 1 lb. of Propane | = | 21,600 |
| 1 Gal. of Propane | = | 91,700 |
| 1 Cu. Ft. of Propane | = | 2,570 |

Oil vs. Electric vs. Propane vs. Natural Gas

| | |
|-------------|---|
| Oil | 1 litre = 36,515 BTUs* Example Price = 60.0¢/litre |
| Electric | 1 Kilowatt Hour = 3,413 BTUs* Example Price = 10.1¢/KW (kilowatt) |
| Propane | 1 litre = 24,197 BTUs* Example Price = 63.0¢/litre |
| Natural Gas | 1 M ³ 35,310 BTUs* Example Price = 44.0¢/M ³ (cubic metre)** |
| Formula | $\frac{\text{BTUs per Unit} \times \text{Efficiency}}{\text{Cost per Unit}}$ |
| Example: | Propane = $\frac{24,197 \times 92\%}{0.63}$ = 35335 BTUs per \$1.00 |

GST is extra on all prices.

* Information supplied by The Ontario Ministry of Energy.

** This price reflects delivery charge and monthly administration charge to service your account.

Formulas and Facts

- 1 gallon of water weighs 8.33 lbs.
- 1 gallon of water has a volume of 231 cubic inches
- 1 cubic foot of water weighs 62.38 lbs. and contains 7.48 gallons of water
- 100 feet of 3/4" copper pipe contains 2.5 gallons of water; 1" pipe contains 4.3 gallons
- 8.33 BTU will raise 1 gallon of water 1° F at 100% efficiency (electricity)

Appendices

Reference Guide for Water Heating

- 11 BTUs are required to raise 1 gallon of water 1° F at 70% efficiency (gas)
- 3,412 BTUs equal 1 kilowatt hour (KW)
- 1 KW will raise 410 gallons of water 1° F at 100% efficiency
- 1 BTU x 0.293 = watts
- 1 KW = 1000 watts
- 2.42 watts are required to raise 1 gallon of water 1° F
 - 1 KW will raise 10.25 gallons of water 40° F at 100% efficiency
 - 1 KW will raise 6.8 gallons of water 60° F at 100% efficiency
 - 1 KW will raise 5.1 gallons of water 80° F at 100% efficiency
 - 1 KW will raise 4.1 gallons of water 100° F at 100% efficiency

Formula for mixing hot water

$$\frac{M-C}{H-C} = \text{Percent of hot water required to produce desired mixed temperature}$$

Where:

M = mixed water temperature;

C = cold water temperature;

H = hot water temperature

For example: How much of a shower is hot water and how much is cold water?

My shower temperature is 105° F, my water heater thermostat is set on 120° F and the cold water inlet temperature is 50° F.

$$\frac{105 - 50}{120 - 50} = \frac{55}{70} = 79\% \text{ of the shower is } 120^\circ \text{ hot water}$$

This formula for mixing hot water is important when explaining a NOT ENOUGH HOT WATER trouble call and the water heater is functioning properly.

| ELECTRIC | GAS |
|---|--|
| ENERGY COSTS: | ENERGY COSTS: |
| KW x fuel costs = energy costs | Cubic feet x fuel costs = energy costs |
| 100 x 0.05 = \$5.00 | 100 x 0.75 = \$7.50 |
| To obtain gallons per hour (GPH) recovery WATTS $\frac{2.42 \times (\text{temp rise } ^\circ \text{F})}{}$ | To obtain gallons per hour (GPH) recovery HOURLY INPUT (BTUs) $\frac{11.0 \times (\text{temp rise } ^\circ \text{F})}{}$ |
| I have a 30-gallon electric heater, non-simultaneous operation, 4,500 watt elements. What is the recovery GPH if my cold water is 40° F and my thermostat is set to 120° F? $\frac{4,500}{2.42 \times 80} = 23 \text{ gallons per hour}$ | I have a 30-gallon gas heater, rated at 40,000 BTUs. What is the recovery GPH if my cold water is 40° F and my thermostat is set to 120° F? $\frac{40,000}{11.0 \times 80} = 45 \text{ gallons per hour}$ |
| Temperature Rise (° F) WATTS $\frac{2.42 \times \text{GPH}}{}$ | Temperature Rise (° F) HOURLY INPUT (BTUs) $\frac{11.0 \times \text{GPH}}{}$ |
| I have a 30-gallon electric heater, non-simultaneous operation, 4,500 watt elements. What is the maximum temperature rise if the heater can recover 23 gallons per hour? $\frac{4,500}{2.42 \times 23 \text{ rise}} = 80^\circ \text{ temp}$ | I have a 30-gallon gas heater, rated at 40,000 BTUs. What is the maximum temperature rise if the heater can recover 45 gallons per hour? $\frac{40,000}{11.0 \times 45 \text{ rise}} = 80^\circ \text{ temp}$ |

Appendices

Reference Guide for Water Heating

| Oil | BTU |
|----------------|--------------------|
| 1 Gal. #1 Fuel | = 136,000 |
| 1 Gal. #2 Fuel | = 138,500 |
| 1 Gal. #3 Fuel | = 141,000 |
| 1 Gal. #5 Fuel | = 148,500 |
| 1 Gal. #6 Fuel | = 152,000 |
| 1 lb. of Gas | = 28" Water Column |
| 1 lb. of Gas | = 16 oz. |
| 100 Cu. Ft. | = 1 therm. |

Conversions

| Multiply | By | To Obtain |
|------------------------------------|---------|----------------|
| BTU/HR | 0.293 | W |
| Ft. | 0.3048 | m |
| Ft./min., fpm | 0.00508 | m/s |
| Ft. ² | 0.0929 | m ² |
| Ft. ³ | 0.0283 | m ³ |
| Gallon (U.S. 231 in ³) | 3.79 | L |
| Gallon | 0.00379 | m ³ |
| Horsepower (boiler) | 9.81 | KW |
| Inch | 25.4 | mm |
| Mile | 1.61 | km |
| Pound lb. (mass) | 0.454 | kg |
| Psi | 6.89 | kPa |